

# TEGRA

PRODUCT CATALOGUE

GLUES • FOAMS • SEALANTS • PAINTS • TAPES • TOOLS



- ▶ FLEXIBILITY
- ▶ CLARITY
- ▶ RELIABILITY

TEGRA is known to its European and Asian partners for these three qualities for over 20 years of our expertise. We identify the needs of our clients and apply our know-how to suit them perfectly through our constant process of adaptive change.

MAIN TEGRA ACTIVITIES:

- Developing products for the building materials market;
- Product distribution;
- Stock management.

# POINT

We have a clue about glue

---

A SMART WAY TO WORK QUICKLY  
AND RELIABLY

---





**POINT HIGH TACK**  
Extremely high initial tack

- MS Polymer based adhesive
- High-strength adhesion
- Elastic
- Can be used for painting
- For indoor and outdoor use

WHITE  
GREY  
BLACK



**POINT 100 GLUE**  
**ONE HUNDRED IDEAS**  
Crystal clear MS Polymer based adhesive

CONNECTS EVERYTHING!

- MS Polymer based
- On dry or wet surface
- Water-proof and elastic
- For indoor and outdoor work

TRANSPARENT



**POINT 103 HYBRI FIX STONE**  
Hybrid adhesive sealant

- High adhesion force: 28 kg/cm<sup>2</sup>
- Non-aggressive to natural stone
- Complete junction strength
- Wide temperature conditions
- Environmentally-friendly, odourless

GREY



**POINT 104 TURBO POWER FIX**  
Ultra strong adhesive

- Strongest adhesion
- Adhesion strength of 20 t/m<sup>2</sup> already after 15 min.
- Bonding force after curing 380 t/m<sup>2</sup>
- Contains no aggressive thinners
- Extremely durable joint, odourless

WHITE



**POINT 105 HYBRI FIX MARINE**  
Hybrid adhesive sealant

- Complete junction strength
- Resistant to seawater and chemical agents
- Wide temperature range

BLACK



**POINT 200 ACRYL TACK INTERIOR**  
Extremely strong initial tack acrylic adhesive

- Suitable for EPS and XPS
- Quick attachment of elements
- The adhesive joint can be painted
- Moisture resistant
- For indoor and outdoor use

WHITE



**POINT 203 FOLIE & MEMBRANE FIX**  
Adhesive and sealant for bonding and sealing acrylic-based films

- Quick and easy instant bonding
- Adheres to most porous and non-porous surfaces
- Excellent adhesion to most films and membranes
- VOC free
- Permanently elastic joint

BLUE



**POINT 204 D3 WOOD FIX**  
Acrylic adhesive

- Moisture resistance class D3
- Fast curing-compression time 15-20 mins.
- Class D4 can be reached with hardener
- Low application temperature, from +8 °C
- High tensile strength – 50 kg/cm<sup>2</sup>

TRANSPARENT



**POINT PU 301 METAL&WOOD FIX**  
Polyurethane adhesive

- Always elastic
- Certified for pedestrian paths and stairs
- Waterproof and low-temperature resistant
- Vibration-resistant

GREY



**POINT PENOPLAST**  
Foam adhesive

- Not sticking valve
- Strong grip at the very start
- For indoor and outdoor work

GREY



**POINT 92 - MONTAGE GLUE**  
For items made of polystyrene foam

- Based on water dispersion
- Do not dissolve polystyrene
- White junction
- For internal and external works

WHITE



**POINT 93 - MONTAGE GLUE**  
For mirrors

- Synthetic rubber based mounting adhesive
- No destruction to the mirror amalgam
- Gluing on glazed surfaces
- Resistant to high loads

BEIGE



**POINT 95 - MONTAGE GLUE**  
Designed for wooden, flakeboard and wood fiber board constructions

- Based on water dispersion
- No solvents, odourless
- Humidity-resistant, paintable
- For internal use

TRANSPARENT



**POINT 96 - MONTAGE GLUE**  
Crystal-transparent

- Synthetic rubber based mounting adhesive
- Water-proof junction
- Fast and strong grip at the very start
- For internal and external works

TRANSPARENT



**POINT 97 - MONTAGE GLUE**  
Glue and gap filler for tiles

- Based on silanized acrylic dispersion
- Humidity-resistant and elastic
- The adhesive is odourless and can be painted
- Mildew-proof

WHITE



**POINT 98 - MONTAGE GLUE**  
All-season super-fast

- Mounting glue Synthetic rubber based mounting adhesive
- Application temperature: from -20 °C
- Powerful grip at the very start
- For indoor and outdoor use

BEIGE



**POINT 99 - MONTAGE GLUE**  
Universal and extra-strong

- Synthetic rubber based mounting adhesive
- For higher loads
- Water-proof junction
- For internal and external works

BEIGE



# POINT 104 TURBO POWER FIX



## POINT 100 – CONNECTS EVERYTHING

MS polymer based mounting glue used for any work related to building, maintenance or household.

Maintaining load	Elastic and waterproof joint	Paintable
Temperature resistance from -40 °C till +90 °C	Transparent joint	

Skin formation ..... 5-15 min.  
 Application temperature ..... +5 °C ... +40 °C  
 Storage temperature ..... +0 °C ... +25 °C  
 Temperature resistance after full hardening ..... -40 °C ... +110 °C

Filling ..... 290 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 03-1-0-100



## POINT 103 HYBRI FIX STONE

**Adhesive and sealant.** Forms a durable, non-shrinking, extremely strong and vibration-resistant joint. Does not contain isocyanates, silicon and solvents. Does not change the color of stone, brick, concrete and marble surfaces. Withstands heavy loads. Recommended for most surfaces (including wet ones).

Maintaining load	No discoloration of brick, stone, concrete, marble	For indoor and outdoor applications
------------------	--	-------------------------------------

Correction time ..... 5-15 min.  
 Application temperature ..... +5 °C ... +40 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -40 °C ... +90 °C

Filling ..... 290 ml  
 Shelf life ..... 18 months

Color: grey  
 Code 03-4-0-115



## POINT 104 TURBO POWER FIX

**Extremely fast curing and extreme grip hybrid adhesive based on SMP polymer is designed for bonding most building materials, including bonding vertical very heavy elements such as ceramic tiles, bricks or stones.** Very high adhesion strength (20 t/m²) is achieved after 15 min.

Maintaining load	For indoor and outdoor applications	For uneven surface	Odourless
------------------	-------------------------------------	--------------------	-----------

Temperature of working environment ..... +5 °C ... +40 °C  
 Temperature resistance after curing ..... -40 °C ... +90 °C  
 Surface setting time ..... 5 min.  
 Cure rate ..... 2-3 mm/24 h

Capacity ..... 290 ml  
 Shelf life ..... 18 months

Color: white  
 Code 03-4-0-109





## POINT 105 HYBRI FIX MARINE

**Adhesive and sealant.** It is a hybrid construction adhesive and sealant with high adhesion strength after curing. Suitable for many construction and finishing materials, as well for teak, bonding and sealing.



Elongation at break ..... 300 %  
 Application temperature ..... +5 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -40 °C ... +90 °C


Filling ..... 290 ml  
 Shelf life ..... 18 months

Color: black  
 Code 03-4-0-115



## POINT 204 D3 WOOD FIX ADHESIVE

**It is a high quality D3 class PVA adhesive with increased adhesion.** It is used for gluing all types of wood, as well as in places where increased resistance to moisture is required.

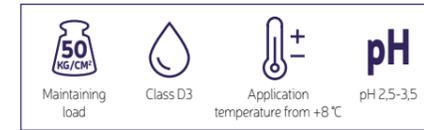

Tensile strength after curing ..... 50 kg/cm<sup>2</sup>  
 Density ..... 1,1 g/ml  
 pH ..... 2.5-3.5  
 Compression force ..... 0,2-0,6 N/mm<sup>2</sup>  
 Application temperature ..... +8 °C ... +30 °C


Capacity ..... 500, 1000 ml  
 Shelf time ..... 18 months

Color: transparent  
 Code 03-4-0-204, 500 ml  
 Code 03-4-0-207, 1000 ml



## POINT 200 ACRYL TACK INTERIOR

**Extremely fast and the strongest primary tack acrylic adhesive.** The adhesive properties allow easy, comfortable and secure gluing of finishing elements and construction elements made of polystyrene, OSB, wood, etc. to most surfaces such as: plaster, masonry, gypsum, metal.



Initial tack force ..... 200 kg/m<sup>2</sup>  
 Tensile strength after curing ..... 55 kg/cm<sup>2</sup>  
 Curing time ..... 24 h  
 Temperature resistance after curing ..... -20 °C ... +75 °C, 300 ml  
 Application temperature ..... +5 °C ... +40 °C, 300 ml  
 Temperature resistance after curing ..... -20 °C ... +60 °C, 80 ml  
 Application temperature ..... +5 °C ... +30 °C, 80 ml


Filling ..... 80 ml, 300 ml  
 Shelf life ..... 18 months

Color: white  
 Code 03-4-0-106, 300 ml  
 Code 03-4-0-200, 80 ml



## POINT PU 301 WOOD & METAL FIX

**Multi-purpose, extra strong polyurethane-based construction adhesive and sealant with permanent elasticity.** Commonly used for bonding and sealing stair treads and metal structures.

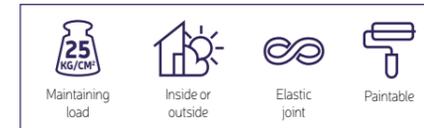

Adhesive strength after curing ... 25 kg/cm<sup>2</sup>  
 Stretching to breaking ..... 450%  
 Shore hardness A ..... 45  
 Thermal resistance after curing ..... -30 °C ... +70 °C  
 Temperature of working environment ..... +5 °C ... +40 °C


Capacity ..... 300 ml  
 Shelf life ..... 18 months

Color: grey  
 Code 03-4-0-301



## POINT 203 FOLIE & MEMBRANE FIX

**Strong and elastic adhesive and sealant based on modified acrylic dispersion for bonding and sealing a wide range of films.** Used for fixing and sealing steam, diffusion, aluminium, polyethylene, polyamide and other films and membranes on surfaces such as plaster, concrete, wood and metal.



Density ..... 1,2 g/ml  
 Film formation ..... 40 min.  
 Thermal resistance after curing ..... -20 °C ... +75 °C  
 Temperature of working environment ..... +5 °C ... +40 °C


Capacity ..... 300 ml  
 Shelf life ..... 18 months

Color: blue  
 Code 03-4-0-201



## HIGH TACK EXPRESS GLUE

**MS POLYMER Based glue with extremely high initial tack.**

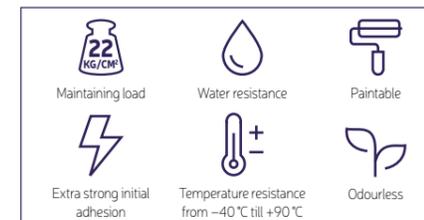


Application temperature ..... +5 °C ... +40 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -40 °C ... +90 °C  
 Curing time ..... 2-3 mm/24 h

Filling ..... 290 ml  
 Shelf life ..... 18 months


Color: white Code 03-4-0-105  
 Color: grey Code 03-4-0-108  
 Color: black Code 03-4-0-107



## VINYLESTER BASE CHEMICAL ANCHOR

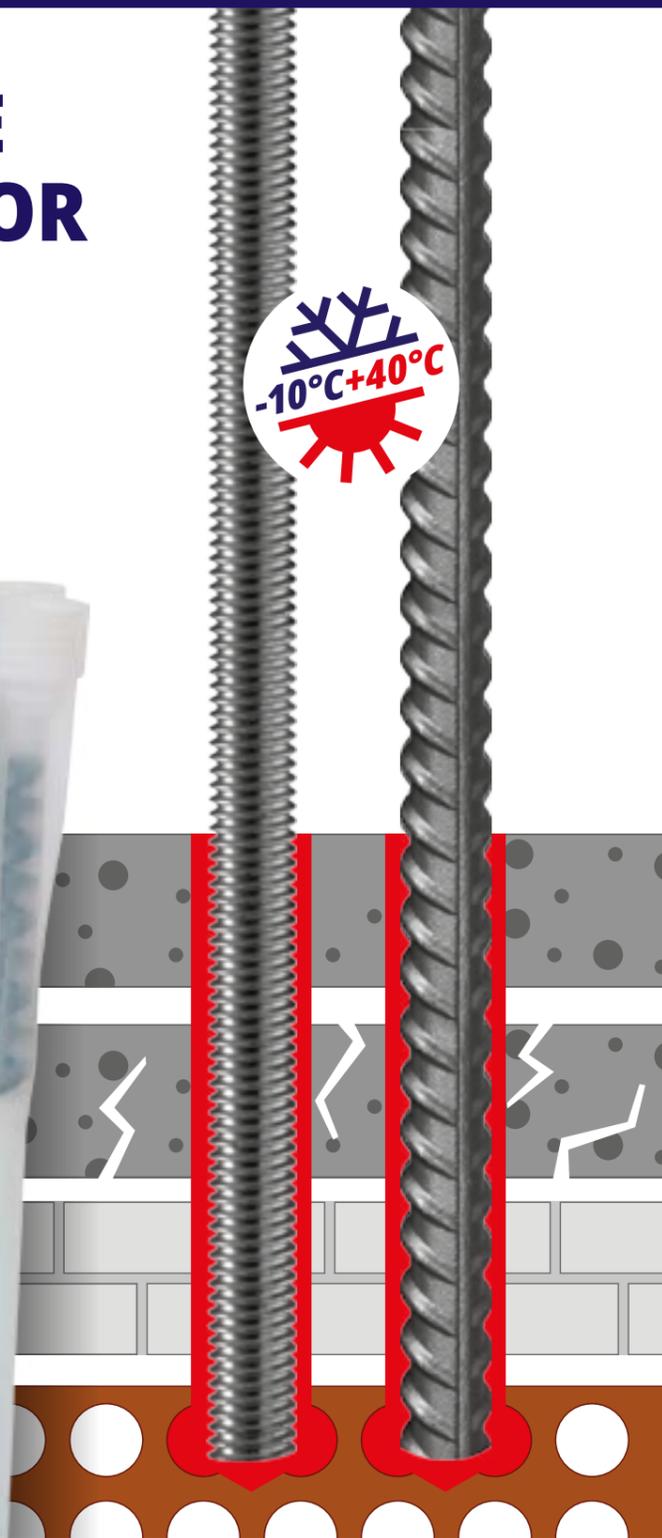

- 

**FOR INDOOR AND OUTDOOR**
- 

**FOR WALLS, SEALING AND FLOOR**
- 

**MAX 22 000 KG**
- 


**SEISMIC CERTIFICATION**
- 

**FOR WET CONCRETE AND FLOODED HOLE**



### POINT 416 POLY FIX


A two-component styrene-free polyester chemical anchor for medium loads, CE marked and ETA assessed, for use in a variety of materials such as concrete, solid and hollow bricks masonry.

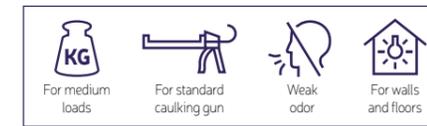

Temperature of working environment ..... 0 °C ... +30 °C


Capacity ..... 300 ml  
Shelf life ..... 15 months

Color: grey  
Code 03-2-0-416



### POINT 430 VINYL FIX

A two-component styrene-free vinylester chemical anchor for structural or heavy loads, CE marked and ETA assessed. For use in a variety of materials such as concrete, cracked concrete, reinforced concrete, solid and hollow bricks masonry and wood.

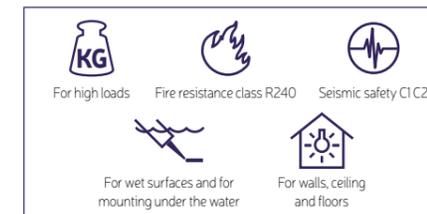

Temperature of working environment ..... -10 °C ... +40 °C


Capacity ..... 300 ml  
Shelf life ..... 15 months

Color: grey  
Code 03-2-0-430



### POINT 501 FIX EXPRESS

A super-fast, multi-purpose adhesive kit consisting of a high-viscosity cyanoacrylate adhesive and an aerosol activator.

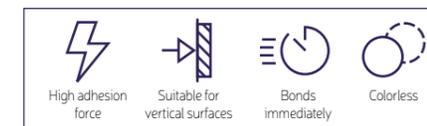

Glue basis ..... Ethyl Cyanoacrylate  
Activator basis ..... Hexane  
Glue appearance ..... liquid gel  
Activator appearance ..... aerosol  
Application temperature ..... +5 °C ... +35 °C  
Temperature resistance after hardening ..... -20 °C ... +70 °C


Capacity ..... 100 ml+25 g  
Shelf life ..... 18 months

Color: transparent  
Code 03-4-0-501



## POINT 92 – POLYSTYRENE ADHESIVE GLUE

Mounting adhesive based on acrylic dispersion. Contains no solvents. Glues light material objects inside and outside the house (expanded polystyrene, cardboard, cork, wood).



Skin formation ..... 10-15 min.  
 Application temperature ..... +15 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -20 °C ... +80 °C

Filling ..... 280 ml  
 Shelf life ..... 18 months

Color: white  
 Code 03-1-0-292



## POINT 96 – CRYSTAL-CLEAR GLUE

Synthetic rubber based mounting glue for installation and finishing works. Creates a strong adhesion with an elastic, transparent and water-resistant joint.



Skin formation ..... 10-15 min.  
 Application temperature ..... +15 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +30 °C  
 Temperature resistance after full hardening ..... -20 °C ... +80 °C

Filling ..... 80 ml, 280 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 03-1-0-296, 280 ml  
 Code 03-1-0-496, 80 ml



## POINT 93 – MIRROR GLUE

Synthetic rubber based mounting glue. Excellent adhesion and joint strength. Elastic and water-resistant joint.



Skin formation ..... 10-20 min.  
 Application temperature ..... +15 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -20 °C ... +60 °C

Filling ..... 280 ml  
 Shelf life ..... 18 months

Color: beige  
 Code 03-1-0-293



## POINT 97 – GLUE AND GAP FILLER FOR TILES

Montage glue based on silanized acrylic dispersion with antifungal supplements, having a bright white joint. For gluing ceramic tiles and various tiles on flat surfaces as well as for filling and renewing of old junctions.



Skin formation ..... 20 min.  
 Application temperature ..... +5 °C ... +40 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -20 °C ... +80 °C

Filling ..... 280 ml  
 Shelf life ..... 18 months

Color: white  
 Code 03-1-0-297



## POINT 95 – GLUE FOR WOODEN CONSTRUCTIONS

For wooden, MDP, MPP and OSB structures.



Skin formation ..... 5-7 min.  
 Application temperature ..... +10 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -20 °C ... +60 °C

Filling ..... 280 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 03-1-0-295



## POINT 98 – ALL SEASON EXPRESS GLUE

All season and extra fast, a synthetic rubber based mounting glue. This bonding construction glue forms a waterproof and elastic joint.



Skin formation ..... 5-7 min.  
 Application temperature ..... -20 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance after full hardening ..... -20 °C ... +60 °C

Filling ..... 280 ml  
 Shelf life ..... 18 months

Color: beige  
 Code 03-1-0-298



## POINT 99 – EXTRA STRONG GLUE

A synthetic rubber based glue with extreme adhesion for repair works.



Skin formation ..... 10-15 min.  
 Application temperature ..... +10 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance  
 after full hardening ..... -20 °C ... +60 °C

Filling ..... 80 ml, 280 ml  
 Shelf life ..... 18 months

Color: beige  
 Code 03-1-0-299, 280 ml  
 Code 03-1-0-499, 80 ml



## POINT PENOPLAST PISTOL

All-season polyurethane mounting foam adhesive for foam guns.  
 Bonds and seals polystyrene, gypsum board, mineral wool, wood, plastic, concrete, brick, metal, plaster, including wet surfaces.



Application temperature ..... -10 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance  
 after full hardening ..... -40 °C ... +80 °C  
 Consumption ..... approx. 8 m<sup>2</sup>/can

Filling weight ..... 780 g  
 Shelf life ..... 24 months

Code 03-0-0-042



## POINT PENOPLAST

All-season adapter polyurethane mounting foam adhesive.  
 Bonds and seals polystyrene, gypsum board, mineral wool, wood, plastic, concrete, brick, metal, plaster, including wet surfaces.




Application temperature ..... -10 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Temperature resistance  
 after full hardening ..... -40 °C ... +80 °C  
 Yield ..... approx. 6 m<sup>2</sup>/can

Filling ..... 780 g  
 Shelf life ..... 24 months

Code 03-0-0-041

## POINT HIGH TACK STRENGTHENED CAULKING GUN


Professional caulking gun for sealants and adhesives. Perfect for all types of adhesives, including very thick. Suitable for sealing with acryl, silicone and polyurethane. Easy to form precise joint.

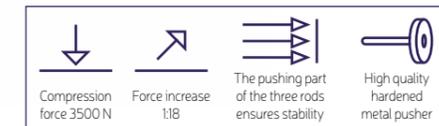

Code 01-2-1-006

## POINT CAULKING GUN


Body: fully metallic, skeleton type.



Code 01-2-1-003

## POINT FOAM GUN

Body: full metal.

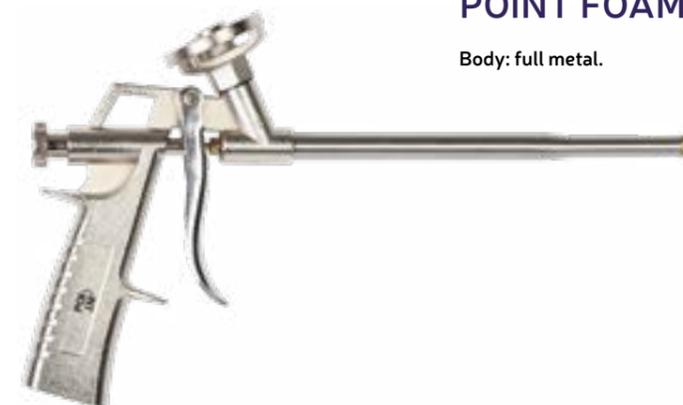

Code 01-2-0-204

# FOME<sup>FLEX</sup>

GET MORE!

---

A JOB DONE FAST AND EFFICIENTLY  
ALLOWS YOU TO EARN MORE AND ENJOY  
YOUR LEISURE TIME

---




# FOME<sup>FLEX</sup>

GET MORE!



## FOME FLEX 7 DOORS & WINDOWS

One-component polyurethane mounting foam FOME FLEX 7 DOORS WINDOWS ELASTIC PISTOL FOAM is intended for professional window and door sealing ensuring highest thermal and acoustic insulation.

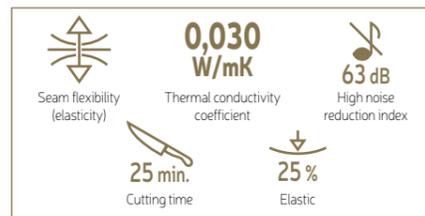

Storage temperature ..... +5 °C ... +25 °C  
Application temperature  
(while raining or snowing) ..... -5 °C ... +35 °C

Filling ..... 750 ml  
Shelf life ..... 18 months



VIDEO

Code 01-3-2-011



## FOME FLEX FIRE BLOCK PISTOL FOAM

Fireproof pistol mounting foam. Used to fill in the gaps between hard mineral or metal construction materials. Properties include excellent fire resistance in demanding environments.



Fire resistance class according to EN 13501-1  
EI 30, EI 60, EI 240  
Output at free expansion ..... approx. 47 liters  
Can temperature ..... min. +5 °C  
Storage temperature ..... +5 °C ... +25 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +80 °C

Filling ..... 750 ml  
Shelf life ..... 18 months

Code 01-3-2-016



## FOME FLEX FAST CUT 75L PISTOL FOAM

New generation FOME FLEX ULTRA FAST 75L is polyurethane mounting foam with ultra-high yield and fastest curing time on the market. Yield is 75-77 litres. Product is developed for very fast installation of windows and doors as well as for sealing of any gaps in construction, ensuring high thermal and sound insulation.



Application temperature  
(while raining or snowing) ..... 0 °C ... +35 °C  
Can temperature ..... optimal +20 °C  
Storage temperature ..... +5 °C ... +25 °C  
Temperature resistance  
after full hardening ..... -60 °C ... +100 °C

Filling ..... 870 ml  
Shelf life ..... 18 months




VIDEO

Code 01-3-2-012



## FOME FLEX BITUMEN FIX FOAM

FOME FLEX BITUMEN FIX FOAM – ultra-low post-expansion adhesive foam for bitumen. For bonding bituminous insulation materials to foundations, roofs and facades, and for gluing many insulation boards to bitumen coated surfaces. No wetting required. Bonding time only 3 min.

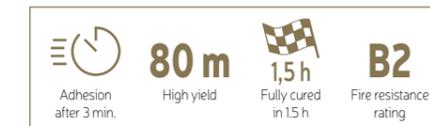

Fully cured ..... 1.5 hours  
Yield (3 cm diameter joint) ..... 80 m.  
Thermal resistance  
after curing ..... -40 °C ... +90 °C  
Temperature of  
working environment ..... +5 °C ... +40 °C  
Capacity ..... 750 ml  
Shelf life ..... 18 months

Code 01-3-2-019




VIDEO



## FOME FLEX ADHESIVE FOAM 60 SEC

It is the fastest primary grip adhesive foam in the market, without secondary expansion, designed for bonding all insulating materials and most finishing, construction and renovation work. The main areas of application: installation of insulation and finishing panels of any size, block masonry, installation of decorative elements, gluing steps, plinth installation, window sills, etc.

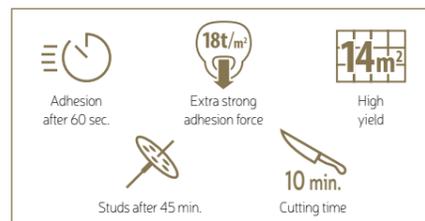

Yield ..... 14 m<sup>2</sup>  
Application temperature ..... +5 °C ... +35 °C  
Can temperature ..... +5 °C ... +30 °C  
(optimal +20 °C)

Storage temperature ..... +5 °C ... +25 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +90 °C

Filling ..... 850 ml  
Shelf life ..... 18 months




VIDEO

Code 01-3-2-015



## FOME FLEX DOUBLE PISTOL FOAM ALL SEASON

Professional mounting foam. The new DOUBLE PISTOL technology allows working with both a regular gun and the adapter (supplied with the product). The foam has a low expansion coefficient when spraying it with a foam gun. Used for mounting and reinforcing door boxes, window boxes and other constructions, as well as for insulating the distribution network, sealing seams and cracks and filling various spaces.

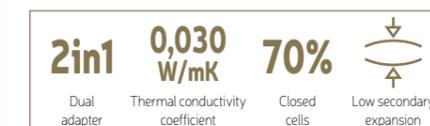

Output at free expansion ..... approx. 45 liters  
Application temperature ..... -10 °C ... +35 °C  
Can temperature ..... +10 °C ... +30 °C  
..... optimal +20 °C  
Storage temperature ..... +5 °C ... +25 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +90 °C

Filling ..... 750 ml  
Shelf life ..... 18 months

Code 01-3-2-008



## FOME FLEX ALL SEASON PISTOL FOAM MEGA 65L

Increased output polyurethane mounting foam provides performance properties over a wide temperature range from -20 °C – to +30 °C. Used for installing door frames, thermal insulation of spaces between the window box and masonry, insulation of the water supply line, insulation and noise absorption of bathtubs and shower trays, filling thorough cracks in masonry and other materials, during roofing thermal insulation works and gluing tiles. This foam also prevents the spread of mold and fungi.

<b>65 L</b> High yield	<b>0,036 W/mK</b> Thermal conductivity coefficient	<b>30 min.</b> Cutting time	<b>+/-</b> Application temperature from -20 °C to +30 °C
---------------------------	---	--------------------------------	---

Output at free expansion ..... up to 65 liters  
 Application temperature ..... -20 °C ... +30 °C  
 Can temperature ..... +5 °C ... +30 °C  
 ..... optimal +20 °C  
 Storage temperature ..... +5 °C ... +30 °C  
 Temperature resistance after full hardening ..... -60 °C ... +100 °C

Filling ..... 870 ml  
 Shelf life ..... 18 months

Code 01-3-2-009



## MOUNTING FOAM FOME FLEX MEGA PISTOL FOAM 65L

Polyurethane mounting foam used for mounting windows and doors frames, as well as other constructions, for heat and sound insulation, sealing of joints, voids, cracks filling, gluing of roof tiles and thermal insulation.

<b>65 L</b> High yield	<b>0,036 W/mK</b> Thermal conductivity coefficient	<b>30 min.</b> Cutting time	<b>61 dB</b> Sound reduction index
---------------------------	---	--------------------------------	---------------------------------------

Application temperature ..... +5 °C ... +30 °C

Filling ..... 890 ml  
 Shelf life ..... 18 months

Code 01-3-2-003



## FOME FLEX MOUNTING FOAM ALL SEASON

Polyurethane mounting foam. Used for installing door frames, thermal insulation of spaces between the window box and masonry, insulation of the water supply line, insulation and noise absorption of bathtubs and shower trays, filling thorough cracks in masonry and other materials, during roofing thermal insulation works and gluing tiles.

<b>750 ml</b> 1 kg/m <sup>3</sup> Water absorption	<b>0,036 W/mK</b> Thermal conductivity coefficient	<b>45 L</b> Yield	<b>+/-</b> Application temperature from -10 °C till +30 °C
<b>230 ml</b>	<b>0,030 W/mK</b> Thermal conductivity coefficient	<b>+</b> Application temperature from -10 °C till +30 °C	

Output at free expansion ..... 12 l / 45 l  
 Application temperature ..... -10 °C ... +30 °C  
 Can temperature ..... +5 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +30 °C  
 Temperature resistance after full hardening ..... -50 °C ... +90 °C

Filling ..... 230 ml / 750 ml  
 Shelf life ..... 18 months

750 ml, code 01-3-2-006  
 230 ml, code 01-3-2-007

## FOME FLEX FOAM CLEANER

Fome Flex Foam Cleaner – is an aerosol cleaning spray designed to remove unhardened mounting foam. Use it to remove this foam from clothes or tools and to clean your foam gun after using it, both on the inside and on the outside. This cleaner can also be used to clean unhardened foam from window frames, doors, door frames and other surfaces.



<b>Fast and effective</b>	<b>Application temperature from -10 °C to +30 °C</b>	<b>No PVC staining</b>	<b>For all foam guns</b>
---------------------------	--	------------------------	--------------------------

Application temperature ..... -10 °C ... +30 °C  
 Storage temperature ..... +5 °C ... +30 °C

Filling ..... 500 ml  
 Shelf life ..... 18 months

Code 01-0-2-004

## FOME FLEX MULTI CLEANER

FOME FLEX MULTICLEANER is universal cleaner. Perfect for removing old stickers, stains from carpets or furniture and cleaning fireplace doors, plumbing materials or jewellery. Liquid is transparent and has fruit scent.



<b>Cleaning of grease stains</b>	<b>Fast action</b>	<b>Fruit odor</b>
<b>Removal of stickers and labels</b>	<b>Cleaning of foam and silicone residues</b>	

Storage temperature ..... +5 °C ... +25 °C

Volume ..... 400 ml  
 Shelf life ..... 24 months

Code 01-0-2-042

## FOME FLEX PROFI WIPES

Wet wipes with abrasive for cleaning hands and tools.

<b>For hands and surfaces</b>	<b>For various tools</b>	<b>pH</b> Neutral pH	<b>Biodegradable</b>
-------------------------------	--------------------------	-------------------------	----------------------

75 tissues ..... per container  
 Size ..... 20 x 21 cm




Code 24-0-1-001



## FOME FLEX GLAZING & FACADE

It is an Oxime-based premium neutral silicone used in window manufacturing and professional glazing, as well as façade work. It is UV, moisture and mold resistant, making it ideal for use in very humid areas inside buildings and for glazing and façade work outdoors as well. Compatible with butyl, plastics and other silicones making it ideal for window applications. Excellent durability properties ensure long service life (Shore A even 26).



Silicone base ..... neutral oxime  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after curing ..... -40 °C ... +100 °C  
Hardening time ..... 24 h

Filling ..... 310 ml  
Shelf life ..... 18 months

Color: transparent  
Code 01-4-2-018




VIDEO



## FOME FLEX 100% SILICONE

It is a premium quality, sanitary-acid clear silicone for professionals. This product is perfect for sealing in bathrooms and kitchens. This silicone is resistant to UV rays and temperature fluctuations, making it ideal for work not only indoors but also outdoors. The highest concentration and highest quality silicone material and the highest protection against mold ensure a fast and guaranteed work result. Extremely fast polymerization time allows you to use a shower, bath or kitchen sink after 25 minutes.

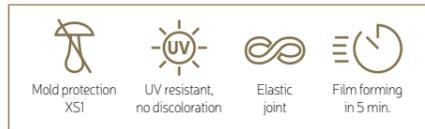

Silicone base ..... acetate silicone  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after curing ..... -40 °C ... +180 °C  
Hardening time ..... 25 h

Filling ..... 310 ml  
Shelf life ..... 18 months

Color: transparent  
Code 01-4-2-045

Color: white  
Code 01-4-2-046




VIDEO



## FOME FLEX SANITARY SILICON 102

This is a high quality, flexible, waterproof, one-component silicone sealant. Suitable for glazing works and sealing in sanitary rooms – sealing sinks, bathtubs, shower cabins, swimming pools connections, water supply, PVC pipes.



Silicone base ..... acetate silicone  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +150 °C  
Storage temperature ..... +5 °C ... +30 °C  
Surface film formation time ..... 10-30 min.  
Hardening time ..... 2,0 mm / 24 h

Filling ..... 310 ml  
Shelf life ..... 18 months

Color: transparent  
Code 01-4-1-101

Color: white  
Code 01-4-1-102

Color: black  
Code 01-4-1-103

Color: beige  
Code 01-4-1-104


Color: brown  
Code 01-4-1-105

Color: grey  
Code 01-4-1-106



## FOME FLEX NEUTRAL

High quality, sanitary, waterproof, single component, neutral silicone sealant. This silicone sealant is No MEKO oxime based and used for: indoor and outdoor works, dry and humid premises, door and window installation, sealing, glazing and ventilation works. This sealant is perfect for acrylic bathtubs and shower trays and is odourless.

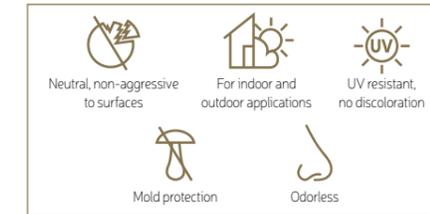

Silicone base ..... neutral oxime  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +100 °C  
Storage temperature ..... +5 °C ... +30 °C

Filling ..... 300 ml  
Shelf life ..... 18 months


Color: white  
Code 01-4-2-001

Color: transparent  
Code 01-4-2-002



## FOME FLEX SEAL & FLEX

It is a new generation, one-component, polyurethane sealant and adhesive for sealing structural and expansion joints, roof joints and floors in pedestrian areas. It has a high resistance to mechanical effects, is always elastic, hardens quickly and is easy to apply. Curing speed even 3mm per day. Unlike the old generation PU sealant, it never forms bubbles and is very user friendly due to its low isocyanate content.

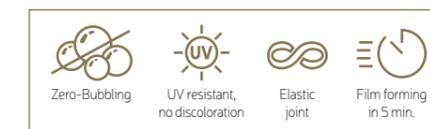

Base ..... new generation PU  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after curing ..... -30 °C ... +80 °C  
Hardening time ..... 24 h

Filling ..... 300 ml  
Shelf life ..... 18 months

Color: grey  
Code 01-4-2-035



VIDEO



## FOME FLEX AQUARIUM

Silicone sealant for outstanding mechanical properties and high rate of hardening.

Used in aquarium production, sealing joints in pools and water parks, sealing terrariums and other glass constructions. Hardened sealant is absolutely harmless to any aquatic organisms.



Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +80 °C  
Storage temperature ..... +5 °C ... +30 °C


Filling ..... 300 ml  
Shelf life ..... 18 months

Color: transparent  
Code 01-4-2-005



## FOME FLEX THERMO

**High temperature resistant silicone for sealing seams exposed to high temperatures and vibration.** This sealant is used to seal automobile engine heads and gaskets of industrial and marine engines, various heating and ventilation devices. This is an excellent sealing and gluing mass and it sticks really well to most of the surfaces (especially to glass and metal).



Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance  
 after full hardening ..... -65 °C ... +260 °C  
 Storage temperature ..... +5 °C ... +25 °C


Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: red  
 Code 01-4-2-006



## FOME FLEX KAMIN

**High quality, one-component silicate sealant, resistant to high temperatures up to +1500 °C.** Used to seal holes, cracks and dents between construction elements (of metal, cement, concrete, rock), exposed to high temperatures. It can be also used in construction of stoves, boilers and fireplaces. This sealant is applied effortlessly on any surface and is resistant to direct fire effects. The sealant becomes inelastic after hardening and does not crack in static seams.



Application temperature ..... +15 °C ... +40 °C  
 Storage temperature ..... +5 °C ... +25 °C


Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: black  
 Code 01-4-2-007



## FOME FLEX ACRYL 202

**Paintable, plastic and elastic sealant based on acrylic dispersion.** Used to treating cracks in concrete, plaster, brickwork and wood. Suitable for indoor and outdoor use. Resistant to temperature and air humidity fluctuations. Forms a stable elastic connection after the evaporation of water.




Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance  
 after full hardening ..... -20 °C ... +75 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Hardening time ..... 2,0 mm / 24 h

Filling ..... 310 ml  
 Shelf life ..... 18 months

Color: white  
 Code 01-5-1-101  
 Color: grey  
 Code 01-5-1-102

## FOME FLEX SILACRYL

**High quality, sanitary sealant with high elasticity properties.** Recommended for sanitary units, as well as for construction works. Almost odourless, perfect adhesion to most surfaces (including wet ones) and easy to apply. Does not require any primer and can be painted over after solidification.

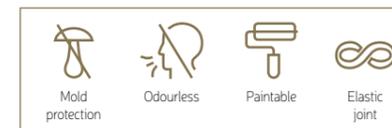

Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance after full hardening:  
 (Transparent) ..... -20 °C ... +60 °C  
 (White) ..... -20 °C ... +80 °C  
 Storage temperature ..... +5 °C ... +25 °C

Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 01-4-2-004  
 Color: transparent  
 Code 01-4-2-004



## FOME FLEX PARQUET

**White, paintable, plastic and elastic sealant based on acrylic dispersion.** Used for treating cracks and joints in wooden floors, parquet, laminate, window frame joints, door boxes, concrete, stone, brick, etc. Suitable for indoor and outdoor use and is resistant to temperature swings and air humidity. Does not cause metal corrosion. Almost odourless and can be painted over. Minimum allowed transportation temperature is -15 °C.



Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance  
 after full hardening ..... -20 °C ... +75 °C  
 Storage temperature ..... +5 °C ... +25 °C


Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: pine  
 Code 01-4-2-020  
 Color: oak  
 Code 01-4-2-021  
 Color: beech  
 Code 01-4-2-022  
 Color: cherry tree  
 Code 01-4-2-023  
 Color: mahogany  
 Code 01-4-2-024



## FOME FLEX FINISH

**FOME FLEX FINISH is an ultralight putty material based on acrylic dispersion used for finishing works** – sealing gypsum board joints, leveling cracks in concrete, gypsum, masonry and plaster.

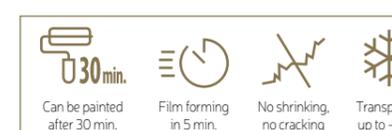

Application temperature ..... +5 °C ... +30 °C  
 Temperature resistance  
 after full hardening ..... -20 °C ... +75 °C  
 Storage temperature ..... +5 °C ... +25 °C  
 Skin formation time ..... 5 min.

Drying speed depends on the thickness  
 of the layer, humidity and  
 air temperature ..... 2 mm / 1-8 h

Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: white  
 Code 01-4-2-014



# FOME FLEX

## Fome Flex Paintasil PAINTABLE SILICONE



### FOME FLEX PAINTASIL

FOME FLEX paintable silicone PAINTASIL – is an easy-to-paint, highly elastic, mould-proof (with fungicide) acrylic sealant suitable for all types of paints. The silicone joint is very flexible and adheres perfectly to most building materials.



Application temperature ..... +5 °C ... +50 °C  
 Temperature resistance after curing ..... -30 °C ... +80 °C  
 Storage temperature ..... +5 °C ... +25 °C

Filling ..... 310 ml  
 Shelf life ..... 18 months

Color: white  
 Code 01-4-2-025




VIDEO



### FOME FLEX HYBRID ROOF & FAÇADE

Is a high-quality professional universal hybrid sealant for sealing structural and expansion joints in facades, roofs on commonly used building materials such as concrete, brickwork, painted wood, enamel, aluminum, stainless steel and various plastics. Forms a particularly elastic and durable seam. It hardens quickly and applies easily.

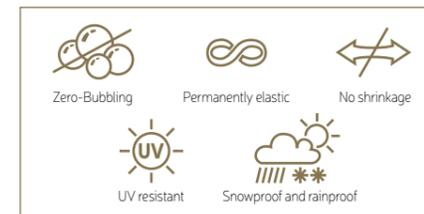

Base ..... SPUR  
 Joint movement capacity ..... 25%  
 Elongation at break ..... 600%  
 Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance after curing ..... -30 °C ... +70 °C  
 Hardening time ..... 24 h

Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: grey  
 Code 01-4-2-038



VIDEO



### FOME FLEX AQUASTOP

High quality synthetic rubber sealant reinforced with fibers. This sealant is used for quick emergency repairs of roofs, drains, facades and boats. The unique formula of this fiber-reinforced sealant allows it to harden immediately after application even under extreme conditions or even under water, in cold conditions, snow or rain. Perfect adhesion with metals, ceramics, bitumen, plastic, wood, glass and concrete. This sealant is also UV light resistant and paintable.



Application temperature ..... -10 °C ... +40 °C  
 Joint temperature resistance ..... -30 °C ... +90 °C  
 Storage temperature ..... +5 °C ... +25 °C

Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 01-4-2-009




VIDEO



## FOME FLEX BITUMEN

High-quality one component sealant based on bitumen, used for sealing roofing, ducts, expansion joints and facade connections. This sealant is thick and can be used in vertical slots. It also becomes resistant to snow, rain, UV radiation and temperature fluctuations immediately after application. Can be used on wet surfaces.

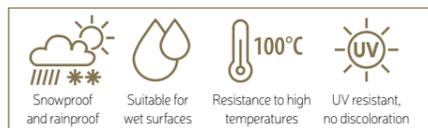

Application temperature ..... +5 °C ... +30 °C  
 Joint temperature resistance -35 °C ... +100 °C  
 Storage temperature ..... +5 °C ... +30 °C

Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: black  
 Code 01-4-2-008



## FOME FLEX KAUCHUK

High-quality one component sealant based on synthetic rubber used for sealing roofing, ducts, expansion joints and facade connections. Perfect adhesion with most of the roofing and construction surfaces, can be applied directly on a wet base. This sealant is compatible with bitumen, is UV resistant, can be dyed and has a very long-lasting adhesion effect.



Application temperature ..... +5 °C ... +40 °C  
 Temperature resistance after full hardening ..... -25 °C ... +100 °C  
 Storage temperature ..... 0 °C ... +25 °C


Filling ..... 300 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 01-4-2-010  
 Color: black  
 Code 01-4-2-011  
 Color: brown  
 Code 01-4-2-012  
 Color: red  
 Code 01-4-2-013  
 Spalva: anthracite  
 Code 01-4-2-015



## FOME FLEX KAUCHUK ALL SEASON

Vinyl polymer based flexible building sealant for roof and facade sealing. Can be used in all seasons, because of the wide range of the working temperature from -10 °C to +30 °C. Seals even submerged underwater surfaces. UV-resistant and mould-resistant. Excellent adhesion to most building materials. Compatible with bitumen and roofing membranes.

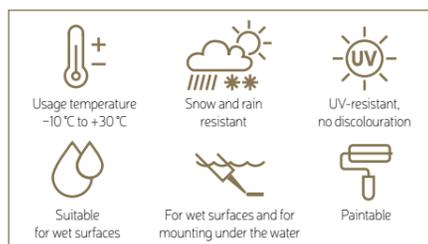

Temperature of working environment ..... -10 °C ... +30 °C  
 Temperature resistance after curing ..... -20 °C ... +90 °C  
 Surface setting time ..... 10-20 min.  
 Shore hardness A ..... 25



Capacity ..... 300 ml  
 Shelf life ..... 18 months

Color: transparent  
 Code 01-4-2-017



## RAPID HYDRO DEFENCE

### BITUMEN-POLYMER PRIMER





- RAINPROOF - 20 MIN
- DRYING TIME - 20 MIN
- SUITABLE FOR MOST SURFACES
- DOES NOT DISSOLVE POLYSTYRENE
- 18 KG - 120 M<sup>2</sup>
- 9 KG - 60 M<sup>2</sup>





## RAPID HYDRO DEFENCE

### BITUMEN-POLYMER MASTIC





- TEMPERATURE RESISTANT -30 °C...+90 °C
- DRYING TIME - 2 HRS
- FULL WATERPROOFING IN 6.5 HRS.
- UV RESISTANT
- FOR INDOOR AND OUTDOOR USE
- FOR ROOFS AND FOUNDATIONS
- DOES NOT DISSOLVE POLYSTYRENE
- 18 KG - 50 M<sup>2</sup>
- 9 KG - 25 M<sup>2</sup>



## HYDRO DEFENCE

### ASPHALT RUBBER COMPOUND





- CRACK RESISTANT - UP TO 5 MM
- HIGHLY ELASTIC
- DOES NOT RUN OFF VERTICAL SURFACES
- FOR FOUNDATION WATERPROOFING AND GLUING THERMAL INSULATION BOARDS
- DOES NOT DISSOLVE POLYSTYRENE
- 0,8-2 KG/M<sup>2</sup> FOR GLUING
- 1,2 K/M<sup>2</sup> PER 1 MM THICKNESS FOR WATERPROOFING




## RAPID HYDRO DEFENCE

### BITUMINOUS-POLYMER FILLER




- RAINPROOF - 2 HRS
- HIGHLY ELASTIC
- UV-RESISTANT
- FOR REPAIRS, CRACKS, CORNERS, BONDING
- DOES NOT DISSOLVE POLYSTYRENE
- FOR GLUING THERMAL INSULATION BOARDS
- 5 KG - 4 M<sup>2</sup> COVERAGE PER 1 MM THICKNESS



## FOME FLEX BLACK EDITION MOUNTING FOAM GUN

BODY: metallic with full Teflon coating and an ergonomic handle.




Code 01-2-0-203



## FOME FLEX MEGA MOUNTING FOAM GUN

BODY: metallic with an ergonomic plastic handle.



Code 01-2-0-202



## FOME FLEX BLACK EDITION PROFESSIONAL SEALANT GUN


Body: fully metallic, skeleton and semi-closed type.



Code 01-2-1-004

## FOME FLEX SEALANT GUN


BODY: fully metallic, skeleton type.

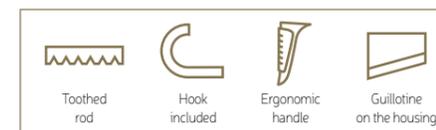

Code 01-2-1-002

## PROFESSIONAL CAULKING GUN FOR SEALANTS FOME FLEX PROFI

**Professional caulking gun for sealants.** The gun tube is made of aluminium as well as seal caps. Perfect for sealing with acryl, silicone and polyurethane. Ensures simple and accurate joint application. Suitable for 600, 450 and 300 ml sealant packages.

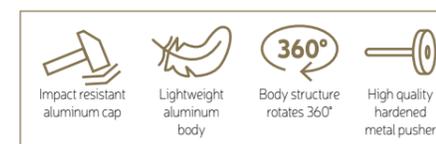

Code 01-2-1-007



## PPLUS PISTOL FOAM

All-season polyurethane foam.

	<b>0,036</b> W/mK		<b>30 L</b>
Application temperature from -10 °C to +30 °C	Thermal conductivity coefficient	40 min. Cutting time	Yield

Output at free expansion ..... approx. 30 l  
 Application temperature ..... -10 °C ... +30 °C  
 ..... Can: min +5 °C  
 ..... Optimal: +20 °C  
 Temperature resistance  
 after full hardening ..... -50 °C ... +90 °C  
 Short-term resistance ..... -65 °C ... +130 °C

Filling ..... 650 g  
 Shelf life ..... 18 months

Code 01-0-0-032



## PPLUS MEGA PISTOL FOAM 65 L

All-season polyurethane mounting foam.

	<b>0,036</b> W/mK		<b>65 L</b>
Application temperature from -10 °C to +30 °C	Thermal conductivity coefficient	Low secondary expansion	Yield

Output ..... up to 65 l  
 Application temperature ..... -10 °C ... +30 °C  
 ..... Can: min +10 °C,  
 ..... Optimal: +20 °C  
 Temperature resistance  
 after full hardening ..... -60 °C ... +100 °C

Filling ..... 820 ml  
 Shelf life ..... 18 months

Code 01-0-0-034



## PPLUS MOUNTING FOAM

All-season polyurethane mounting foam.

	<b>0,036</b> W/mK		<b>36 L</b>
Application temperature from -10 °C to +30 °C	Thermal conductivity coefficient	Low secondary expansion	Yield

Output ..... up to 36 l  
 Application temperature ..... -10 °C ... +30 °C  
 ..... Can: min +5 °C  
 ..... Optimal: +20 °C  
 Temperature resistance  
 after full hardening ..... -50 °C ... +90 °C


Filling ..... 600 g  
 Shelf life ..... 18 months

Code 01-0-0-031

THE PERFECT COMBINATION OF PRICE  
 AND QUALITY PRODUCTS THAT  
 SOLVE EVERYBODY'S PROBLEMS  
 FOR AN AFFORDABLE PRICE

## PPLUS SILICONE

Sanitary silicone sealant.




- Color: white  
280 ml, code 01-4-1-071  
50 ml, code 01-4-1-073
- Color: transparent  
280 ml, code 01-4-1-072  
50 ml, code 01-4-1-074

Basis ..... acetate silicone  
Drying speed ..... 2,0 mm / 24 h  
Skin formation time ..... 15-30 min.  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after full hardening ..... -40 °C ... +100 °C

Filling ..... 280 ml / 50 ml  
Shelf life ..... 18 months

## PPLUS MOUNTING FOAM GUN

BODY: metal with a plastic handle.

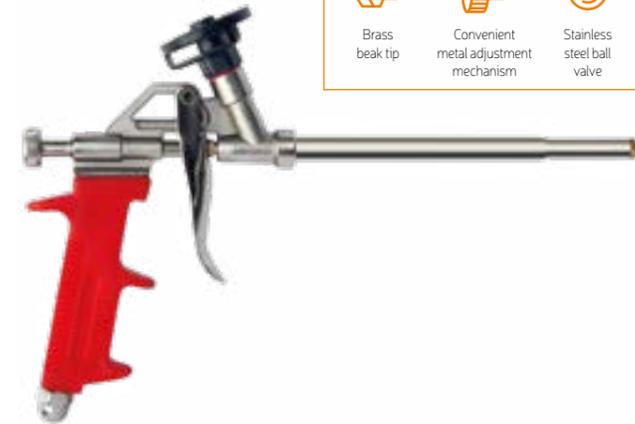

## PPLUS ACRYL

Acrylic sealant.



- Color: white  
Code 01-5-1-041

Joint type ..... plastic-elastic  
Drying speed ..... 1-2 mm / 24 h  
Skin formation time ..... 20 min.  
Application temperature ..... +5 °C ... +40 °C  
Temperature resistance  
after curing ..... -20 °C ... + 75 °C

Filling ..... 280 ml  
Shelf life ..... 18 months

## PPLUS SEALANT GUN

Body: fully metallic, skeleton type.



# INRAL

CREATING IS EASY

---

ALL OF US HAVE UNIQUE PERSONALITIES.  
WE CHANGE WITH THE TIME, BUT OUR  
COLORS AND VALUES HAVE TO STAY  
THE SAME: STABLE AND BRIGHT

---



## INRAL UNIVERSAL ENAMEL

Universal quick-drying enamel for metal, wooden, plastic, gypsum and plaster surfaces.  
Matte, Semi Matte and Glossy colors.



- ▶ PROVIDES A GREAT, BRIGHT GLOSS
- ▶ DRIES QUICKLY
- ▶ EXCELLENT COVERAGE AND ADHESION TO SURFACE
- ▶ FOR INTERIOR AND EXTERIOR USE
- ▶ DOES NOT CONTAIN LEAD AND CHROME COMPOUNDS
- ▶ DOES NOT CONTAIN SUBSTANCES DAMAGING THE OZONE LAYER

Basis ..... alkyd copolymers  
Drying time at +20 °C ..... approx. 10 min.  
Presumed coverage ..... one can  
(400 ml) for 2 m<sup>2</sup>  
Recommended number of layers ..... 2-3  
Filling ..... 400 ml

- GLOSSY (02) Color: signal white glossy, code 26-7-6-002 RAL9003
- MATTE (03) Color: Signal white matte, code 26-7-6-003 RAL9003
- GLOSSY (08) Color: beige, code 26-7-6-008 RAL1001
- GLOSSY (39) Color: zinc yellow, code 26-7-6-039 RAL1018
- SATIN (51) Color: traffic yellow satin, code 26-7-6-051 RAL1023
- GLOSSY (40) Color: signal yellow, code 26-7-6-040 RAL1003
- GLOSSY (38) Color: melon yellow, code 26-7-6-038 RAL1028
- GLOSSY (13) Color: pure orange, code 26-7-6-013 RAL2004
- GLOSSY (14) Color: traffic red, code 26-7-6-014 RAL3020
- GLOSSY (44) Color: flame red glossy, code 26-7-6-044 RAL3000
- SATIN (52) Color: flame red satin, code 26-7-6-052 RAL3000
- GLOSSY (24) Color: carmine red, code 26-7-6-024 RAL3002
- GLOSSY (16) Color: brown red, code 26-7-6-016 RAL3011
- GLOSSY (23) Color: purple red, code 26-7-6-023 RAL3004
- GLOSSY (10) Color: mahogany brown, code 26-7-6-010 RAL8016
- GLOSSY (15) Color: chocolate brown glossy, code 26-7-6-015 RAL8017
- SATIN (17) Color: chocolate brown satin, code 26-7-6-017 RAL8017
- METALLIC (21) Color: aluminium metallic, code 26-7-6-021 RAL9006
- METALLIC (20) Color: pearl gold metallic, code 26-7-6-020 RAL1036
- METALLIC (19) Color: pearl copper metallic, code 26-7-6-019 RAL8029

- GLOSSY (50) Color: pure white glossy, code 26-7-6-050 RAL9010
- MATTE (49) Color: pure white matte, code 26-7-6-049 RAL9010
- GLOSSY (30) Color: light blue, code 26-7-6-030 RAL5012
- GLOSSY (31) Color: gentian blue glossy, code 26-7-6-031 RAL5010
- SATIN (53) Color: gentian blue satin, code 26-7-6-053 RAL5010
- GLOSSY (32) Color: ultramarine blue, code 26-7-6-032 RAL5002
- GLOSSY (33) Color: night blue, code 26-7-6-033 RAL5022
- GLOSSY (35) Color: mint green, code 26-7-6-035 RAL6029
- GLOSSY (41) Color: moss green glossy, code 26-7-6-041 RAL6005
- SATIN (54) Color: moss green satin, code 26-7-6-054 RAL6005
- GLOSSY (34) Color: fir green, code 26-7-6-034 RAL6009
- GLOSSY (47) Color: Silver grey, code 26-7-6-047 RAL7001
- GLOSSY (06) Color: telegrey 2, code 26-7-6-006 RAL7046
- GLOSSY (07) Color: graphite grey, code 26-7-6-007 RAL7024
- GLOSSY (12) Color: anthracite grey glossy, code 26-7-6-012 RAL7016
- SATIN (11) Color: anthracite grey satin, code 26-7-6-011 RAL7016
- GLOSSY (04) Color: traffic black glossy, code 26-7-6-004 RAL9017
- MATTE (05) Color: graphite black matte, code 26-7-6-005 RAL9011
- GLOSSY (45) Color: jet black glossy, code 26-7-6-045 RAL9005
- MATTE (46) Color: jet black matte, code 26-7-6-046 RAL9005

# INRAL

## CREATING IS EASY



**UNIVERSAL**  
Multipurpose enamel paint for all surfaces



**LACKER**  
Quick-drying acrylic varnish



**GROUND**  
Multipurpose anti-corrosion primer



**ZINC GROUND**  
Anti-corrosion zinc primer



**PLASTIC GROUND**  
Special plastic primer



**FLUOMARKER**  
Marking paint



**RADIATOR**  
Special paint for radiators and heaters



**CERAMICS**  
Paints to renew and repair ceramic and enamel surfaces



**THERMAL**  
Paint for heated surfaces



**ROOF SPRAY**  
Protective roofing paints



**METAL PAINT**  
4 in 1: primer, anti-corrosion, color paint, varnish protecting against the effects of the environment



**METALLIC**  
Shiny metal varnish with color



**FLUORESCENT**  
Ultra-bright paint that shines in neon light



**GRANITE EFFECT**  
Decorative paint with granite stone effect



**HAMMER EFFECT**  
Impressive chisel hammer effect and resistance to adverse weather conditions



**GLITTER EFFECT**  
Protective varnish with silver glitter effect



**CHROME**  
Paint for metallic chrome type look

## INRAL LACKER ACRYLIC

This is an aerosol acrylic, glossy and quick-drying lacquer. Used to cover metallic, wooden, glass, ceramic and plastic surfaces. This lacquer forms a half-matte hard surface, resistant to temperature, cracking, scratches and peeling off.



- ▶ GREAT SHINE PROPERTIES
- ▶ EXCELLENT COVERAGE AND ADHESION TO VARIOUS SURFACES
- ▶ SOLAR RAY AND RAIN RESISTANT FOR INTERIOR AND EXTERIOR USE
- ▶ CREATES A HARD SURFACE, RESISTANT TO TEMPERATURE, CRACKING, SCRATCHES AND PEELING OFF

Basis ..... acrylic resin  
 Drying time at +20 °C ..... approx. 10 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

Color: transparent  
 Code 26-7-0-002

## INRAL LACKER ACRYLIC

This is an aerosol acrylic, matte and quick-drying lacquer. Used to cover metallic, wooden, glass, ceramic and plastic surfaces. This lacquer forms a half-matte hard surface, resistant to temperature, cracking, scratches and peeling off.



- ▶ GREAT MATTE PROPERTIES
- ▶ EXCELLENT COVERAGE AND ADHESION TO VARIOUS SURFACES
- ▶ SOLAR RAY AND RAIN RESISTANT FOR INTERIOR AND EXTERIOR USE
- ▶ CREATES A HARD SURFACE, RESISTANT TO TEMPERATURE, CRACKING, SCRATCHES AND PEELING OFF

Basis ..... acrylic resin  
 Drying time at +20 °C ..... approx. 10 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

Color: transparent  
 Code 26-7-0-003

## INRAL GROUND ANTI-CORROSION

This is an aerosol anticorrosion protection paint for steel, cast iron and other surfaces. Perfect adhesion with the base surface, resistant to wear. Used as priming for decorative enamels of the INRAL UNIVERSAL series or its alternatives.



- ▶ FAST-DRYING
- ▶ MATTE
- ▶ EXCELLENT COVERAGE AND ADHESION TO SURFACES
- ▶ EXCELLENT ADHESION TO OTHER ENAMELS
- ▶ RESISTANCE TO WEATHERING AND PERIODICAL WATER EXPOSURE
- ▶ THERMAL RESISTANCE UP TO +110 °C
- ▶ DOES NOT CONTAIN LEAD AND CHROME COMPOUNDS

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 10 min.  
 Presumed coverage ..... one can  
 (400 ml) for 1,5 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

- Color: white, code 26-7-2-001 RAL9003
- Color: black, code 26-7-2-002 RAL9011
- Color: grey, code 26-7-2-003 RAL7040
- Color: red, code 26-7-2-004 RAL3009

## INRAL ZINC GROUND ANTI-CORROSION

This is an aerosol anticorrosive protection paint for steel and cast iron constructions, metal elements, machines and various devices, industrial devices, construction surfaces, energy structures, poles, street lights, fences, storage premises, tin plates, etc. Zinc accounts for approx. 85% of the dry mass of the cover actively protects iron compound surfaces acting as a protective lining. The primer (ground) layer can be then covered with acryl, polyvinyl or alkyd paints.



- ▶ FAST-DRYING
- ▶ EXCELLENT COVERAGE AND ADHESION TO VARIOUS SURFACES
- ▶ SOLAR RAY AND RAIN RESISTANT
- ▶ FOR INTERIOR AND EXTERIOR USE

Basis ..... vinyl  
 Drying time at +20 °C ..... approx. 20 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml

Color: zinc  
 Code 26-7-2-009

## INRAL PLASTIC GROUND

This is an aerosol ground (primer) for plastic surfaces. It is intended for cars, motorcycles, alcoves or any other plastic surfaces. This primer is characterized by high quality and resistance to wear. Excellent coverage. Does not contain chrome and lead compounds.



- ▶ FAST DRYING
- ▶ COLORLESS
- ▶ EXCELLENT COVERAGE AND ADHESION TO SURFACE
- ▶ EXTREME RESISTANCE TO WEAR
- ▶ DOES NOT CONTAIN LEAD AND CHROME COMPOUNDS

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 5 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml

Color: transparent  
 Code 26-7-2-010

## INRAL CERAMICS HIGH-GLOSS COATING

This aerosol spray paint is used to paint and eliminate defects on ceramics and enamel surfaces, such as: bathtubs, furniture, refrigerators, washing machines, etc. This paint forms a glossy hard surface, resistant to temperature, cracking, scratches and peeling off.



- ▶ EXCELLENT COVERAGE AND ADHESION TO VARIOUS SURFACES
- ▶ APPLIES SMOOTHLY
- ▶ SOLAR RAY AND RAIN RESISTANT
- ▶ FOR INTERIOR AND EXTERIOR USE
- ▶ DOES NOT CONTAIN SUBSTANCES DAMAGING THE OZONE LAYER

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 4 h  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

Color: white, glossy, code 26-7-3-011 RAL9003

## INRAL THERMAL ENAMEL

This is an aerosol enamel for hot surfaces, such as ovens, heaters, radiators, grills, boilers. It provides a durable and long-term protection of the surface from high temperatures.



- ▶ PROVIDES A DURABLE AND LONG-TERM PROTECTION OF THE SURFACE FROM HIGH TEMPERATURES - UP TO +800 °C
- ▶ APPLIES SMOOTHLY
- ▶ DOES NOT CONTAIN LEAD AND CHROME COMPOUNDS
- ▶ DOES NOT CONTAIN SUBSTANCES DAMAGING THE OZONE LAYER

Basis ..... vinyl  
 Drying time at +20 °C ..... approx. 20 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml

Color: white, code 26-7-4-001  
 RAL9003

Color: aluminum, code 26-7-4-002  
 RAL9006

Color: black, code 26-7-4-003  
 RAL9011

Color: grey, code 26-7-4-005  
 RAL7016

## INRAL FLUOMARKER

Aerosol acrylic fluorescent marker paint.



- ▶ THE MARKINGS ARE TEMPORARY AND DISSOLVE WITHOUT ANY TRACE AFTER 3 MONTHS
- ▶ 360 DEGREES SPRAY DIRECTION
- ▶ 5 YEAR WARRANTY
- ▶ DOES NOT CONTAIN HEAVY METALS
- ▶ COVER SHOWS APPROXIMATE COLOR

Basis ..... acrylic resin  
 Drying time at +20 °C ..... approx. 5 min.  
 Recommended number of layers ..... 1  
 Filling ..... 500 ml

Color: green  
 Code 26-7-5-010

Color: yellow  
 Code 26-7-5-007

Color: red  
 Code 26-7-5-008

Color: orange  
 Code 26-7-5-009

## INRAL RADIATOR

Spray paint for radiators, heaters, boilers or other surfaces heated up to 100 °C.



- ▶ THE UNIQUE PROPERTIES OF THIS PAINT ALLOW IT NOT TO TURN YELLOW
- ▶ THIS PAINT CREATES A SMOOTH SURFACE RESISTANT TO MECHANICAL DAMAGE
- ▶ 10 YEAR WARRANTY
- ▶ DOES NOT CONTAIN HEAVY METALS
- ▶ DOES NOT HARM THE OZONE LAYER
- ▶ COVER SHOWS APPROXIMATE COLOR

Basis ..... modified alkyd  
 Drying time at +20 °C ..... approx. 20 h  
 Presumed coverage ..... approx. 1,2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml

Color: white  
 Code 26-7-4-004

## INRAL ROOF SPRAY

This is a fast-drying aerosol paint for painting and eliminating defects in metal roof tiles and rainwater pipes. This enamel creates a hard surface, resistant to temperature, cracking, scratches and peeling off.



- ▶ SUITABLE FOR OTHER METAL SURFACES
- ▶ INRAL PAINT COLORS MEET THE BASIC TONES OF METAL ROOF TILES
- ▶ APPLIES SMOOTHLY
- ▶ EXCELLENT ADHESION TO THE SURFACE
- ▶ UV AND RAIN RESISTANT FOR INTERIOR AND EXTERIOR USE
- ▶ DOES NOT CONTAIN CHROME OR LEAD COMPOUNDS
- ▶ DOES NOT CONTAIN SUBSTANCES DAMAGING THE OZONE LAYER

Basis ..... modified alkyd resin  
 Drying time at +20 °C ..... approx. 10 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

Color: chocolate brow, code 26-7-7-001  
 RAL8017

Color: brown red, code 26-7-7-002  
 RAL3011

Color: moss green, code 26-7-7-004  
 RAL6005

Color: grey brown, code 26-7-7-007,  
 RAL8019

Color: anthracite grey, code 26-7-7-008  
 RAL7016

Color: graphite grey, code 26-7-7-009  
 RAL7024

## INRAL CAMOUFLAGE COLORS PAINTS

INRAL CAMOUFLAGE spray paint in standart military colors with matte finishing. CAMOUFLAGE is weather-resistant and high quality paint which can be used for furniture, interior decorating or outdoor activities. It can be applied on various surfaces, such as metal, wood, ceramics, stone, clay, glass, paper and paintable plastics. Ideal for DIY enthusiasts, craftsmen and industrial users.



- ▶ RESISTANT TO UV AND OUTDOOR CONDITIONS
- ▶ CAN BE USED AS 1 COLOR PAINT OR TO CREATE A CAMOUFLAGE PATTERN WITH SEVERAL COLORS

Basis ..... Nitro combination resins  
 Drying time ..... 20 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml

Color: tar black, code 26-8-4-001  
 RAL9021

Color: bronze green, code 26-8-4-002  
 RAL6031

Color: agate grey, code 26-8-4-003  
 RAL7038

Color: leather brown, code 26-8-4-004  
 RAL8027

Color: beige, code 26-8-4-005  
 RAL1001

## INRAL METAL PAINT 4 IN 1

Aerosol metal paint 4 in 1 INRAL Decor. Paint combines four features in one: primer, rust protection, color paint and the varnish that protects against the effects of the environment. Also suitable for painting steel or wood.



- ▶ 4 PRODUCTS IN ONE
- ▶ SAVES TIME AND MONEY
- ▶ UV RESISTANT
- ▶ RESISTANT TO TEMPERATURE CHANGES

Basis ..... a mixture of synthetic resin acrylate  
 Drying time ..... 48 hours  
 Presumed coverage ..... one can  
 (400 ml) for 1,5 m<sup>2</sup>  
 Recommended number of layers ..... 3-4  
 Filling ..... 400 ml

Color: black matte  
 Code 26-8-3-001

Color: grey anthracite  
 Code 26-8-3-002

Color: gold matte  
 Code 26-8-3-003

## INRAL FLUORESCENT

This is a decorative quick-drying acrylic aerosol enamel with special optical properties. The unique composition guarantees high durability and longevity of the colors. This enamel is intended for decorative painting of various surfaces or marking informational, advertising signs and inscriptions.

- ▶ CREATES A MATTE SURFACE WITH FLUORESCENCE IN DAYLIGHT
- ▶ QUICK-DRYING PAINT
- ▶ PAINT LAYER IS DURABLE AND DOES NOT WEAR OUT QUICKLY
- ▶ FOR INTERIOR AND EXTERIOR USE
- ▶ DOES NOT CONTAIN CHROME OR LEAD COMPOUNDS

Basis ..... acrylic resin  
 Drying time at +20 °C ..... approx. 20 min.  
 Presumed coverage ..... one can (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml



- Color: red Code 26-7-5-001
- Color: orange Code 26-7-5-003
- Color: yellow Code 26-7-5-004
- Color: green Code 26-7-5-005

## INRAL METALLIC

Acrylic lacquer with a metallic effect. Creates a smooth surface with a metallic effect, dries quickly, is of high quality and coverage. This lacquer creates an elastic and strong top layer. Can be used for various surfaces: metal, wood, stone, glass, ceramics, paper, cardboard, hard plastic (with the use of INRAL Plastic primer).

- ▶ FAST DRYING
- ▶ EXCELLENT COVERAGE OF SURFACES WITH A METALLIC EFFECT
- ▶ SOLAR RAY AND RAIN RESISTANT
- ▶ DOES NOT CONTAIN LEAD AND CHROME COMPOUNDS

Basis ..... acrylic thermoplastic  
 Time of drying ..... approx. 15 min.  
 Presumed coverage ..... one can (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



- Color: red Code 26-7-8-001
- Color: green Code 26-7-8-002
- Color: blue Code 26-7-8-003
- Color: black Code 26-7-8-004
- Color: silver Code 26-7-8-005
- Color: gold Code 26-7-8-006

## INRAL CHROME

This is an acrylic decorative lacquer with a metallic effect. Designed for painting metallic, wooden, glass and plastic surfaces.

- ▶ FAST-DRYING
- ▶ GREAT METALLIC SHINE
- ▶ EXCELLENT COVERAGE AND ADHESION TO VARIOUS SURFACES
- ▶ APPLIES SMOOTHLY
- ▶ SOLAR RAY AND RAIN RESISTANT FOR INTERIOR AND EXTERIOR USE
- ▶ CREATES A HARD SURFACE, RESISTANT TO TEMPERATURE, CRACKING, SCRATCHES AND PEELING OFF
- ▶ DOES NOT CONTAIN CHROME OR LEAD COMPOUNDS
- ▶ DOES NOT CONTAIN SUBSTANCES DAMAGING THE OZONE LAYER

Basis ..... acrylic resin  
 Drying time at +20 °C ..... approx. 7 min.  
 Presumed coverage ..... one can (400 ml) for 2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



- Color: gold Code 26-7-1-001
- Color: copper Code 26-7-1-002
- Color: silver Code 26-7-1-003

## INRAL HAMMER

Decor Hammer effect spray paint. Hammer paint is of high quality, resistant to adverse weather conditions and has an impressive chisel hammer texture. Designed for painting: metal, plastic, polystyrene, stone, clay, ceramics, glass, etc. The paint is most commonly used to paint toolboxes, mailboxes, fences, flower pots, and so on. The paint is water resistant, so it is suitable for both outdoor and indoor use.

- ▶ NOSTALGIC HAMMER EFFECT
- ▶ RESISTANT TO OUTDOOR CONDITIONS
- ▶ UNIQUE EFFECT WILL GIVE ITEMS A SPECIAL APPEARANCE

Basis ..... nitro resins  
 Drying time ..... about 24 hours  
 Presumed coverage ..... one can (400 ml) for 1,5 m<sup>2</sup>  
 Recommended number of layers ..... 2-3  
 Filling ..... 400 ml



- Color: gold Code 26-8-1-001
- Color: silver Code 26-8-1-002
- Color: copper Code 26-8-1-003
- Color: anthracite grey Code 26-8-1-004

## INRAL GRANITE

**Decor Granite spray paint with stone texture effect.** Decorative paint creates an imitation of solid and real stone. Sprayed on surfaces that are not usually made of stone, such as metal, wood, plastic, polystyrene, clay, ceramic, glass to give an imitation of a stone surface. Can be used indoors or outdoors (away from rain and moisture).

- ▶ THE GRANITE EFFECT CAN MAKE ANY ITEM TO LOOK LIKE A STONE
- ▶ SPECIAL ROUGH COATING

Basis ..... special resins  
 Drying time ..... about 2 hours  
 Presumed coverage ..... one can  
 (400 ml) for 2,2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



-  Color: obsidian black  
Code 26-8-2-001
-  Color: cream, matte  
Code 26-8-2-002
-  Color: red bricks, matte  
Code 26-8-2-003

## INRAL RUST

**Inral Rust is a fast drying spray for rust imitation. Intended for decorative painting of wood, metal, aluminum, glass, stone and plastic surfaces.**

- ▶ FAST-DRYING
- ▶ EXCELLENT COVERAGE AND
- ▶ ADHESION TO VARIOUS SURFACES
- ▶ SPECIAL ROUGH COATING
- ▶ INDOOR OR OUTDOOR USE
- ▶ UV AND RAIN RESISTANT
- ▶ FOR INTERIOR AND EXTERIOR USE

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 1 h  
 Presumed coverage ..... one can  
 (400 ml) for 1,5 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



-  Color: Rust Brown  
Code 26-8-2-010

## INRAL SAND

**Inral Sand is a decorative spray paint that gives a very natural sandstone effect.** For the surfaces of metal, wood, plastic, polystyrene, stone, clay, ceramic, glass, paper and paperboard.

- ▶ FAST-DRYING
- ▶ REALISTIC DESERT SAND LOOK
- ▶ SPECIAL ROUGH COATING
- ▶ INDOOR OR OUTDOOR USE

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 1 h  
 Presumed coverage ..... one can  
 (400 ml) for 1,2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



-  Color: desert sand  
Code 26-8-2-020

## INRAL GLITTER

**Inral Glitter is a protective varnish that makes silver glitter effect.** The final effect depends on the color of the painted element. The darker the element, the brighter the effect. Intended for painting wood, metal, glass, ceramics, plastic and paper surfaces.

- ▶ FAST-DRYING
- ▶ WITH SILVER MICA PARTICLES
- ▶ SPECIAL SHINY COATING
- ▶ INDOOR OR OUTDOOR USE

Basis ..... alkyd resin  
 Drying time at +20 °C ..... approx. 20 min.  
 Presumed coverage ..... one can  
 (400 ml) for 2,2 m<sup>2</sup>  
 Recommended number of layers ..... 1-2  
 Filling ..... 400 ml



-  Color: transparent with silver particles  
Code 26-7-0-010

# ZOOM

Any donkey can become a zebra



---

OUR CONSTRUCTION SCOTCH  
AND ADHESIVE TAPES WILL EASE  
YOUR WORKING PROCESS AND  
OFFER YOU SIMPLE SOLUTIONS

---

## ZOOM

Painting tapes






# ZCOM

**SENSITIVE PLUS** tape will ensure a quality result in straight lines, when painting on sensitive or once-painted surfaces. Special paper is very flexible and resistant to moisture, so will help to create a masterpiece on painted walls.

Tape thickness ..... 83 µm  
 Adhesion to steel ..... 0.9 N/cm  
 Application temperature ..... -10 °C to +90 °C  
 Glue ..... acrylic  
 Paper ..... washi

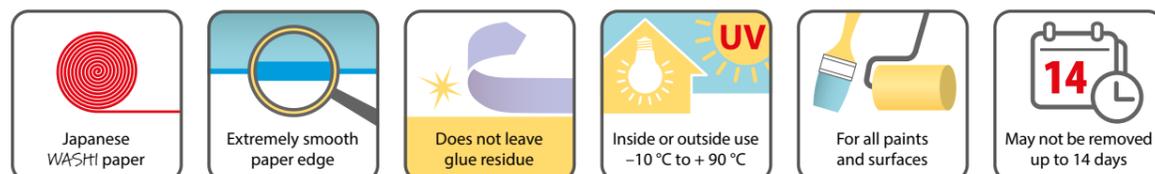


Assortment:



# ZCOM

Professional tapes for painting inside or outside. **PRECISION** tape will help to extract a straight and perfect line.

Tape thickness ..... 90 µm  
 Adhesion to steel ..... 3.75 N/cm  
 Application temperature ..... to +125 °C  
 Glue ..... acrylic  
 Paper ..... washi

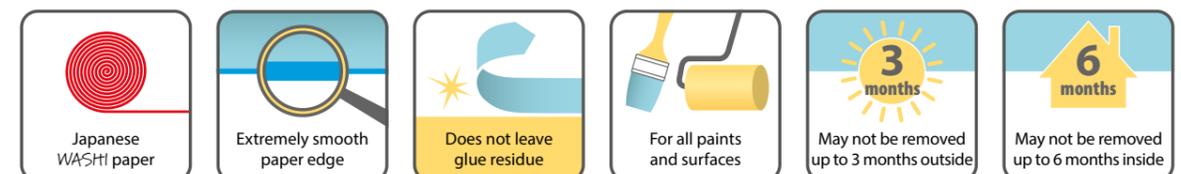

Assortment:





## ZOOM PROFESSIONAL PAINTING TAPE

PRECISION tape will help to extract a straight and perfect line.

- ▶ SHARP CUTTING ANGLE OF TAPE WILL HELP TO EXTRACT A PERFECT LINE
- ▶ PROFESSIONAL TAPE DOES NOT LEAVE ADHESIVE RESIDUES
- ▶ MADE OF SPECIAL JAPANESE WASHI PAPER
- ▶ SUITABLE FOR PAINTING WITH ALL PAINTS
- ▶ CAN BE UPLIED UP TO 6 MONTHS INSIDE AND 3 MONTHS OUTSIDE
- ▶ SUITABLE FOR USE ON VARIOUS SURFACES

Tape thickness ..... 90 µm  
 Adhesion to steel ..... 3.75 N/cm  
 Application temperature ..... to +125 °C  
 Glue ..... acrylic  
 Paper ..... washi



Color: yellow  
 25 mm x 50 m, code 02-5-1-601  
 30 mm x 50 m, code 02-5-1-601  
 38 mm x 50 m, code 02-5-1-602



## ZOOM PROFESSIONAL PAINTING TAPE

SENSITIVE PLUS tape will ensure a quality result in straight lines, when painting on sensitive or once-painted surfaces. Special paper is very flexible and resistant to moisture, so will help to create a masterpiece on painted walls. May not be removed from sensitive surfaces up to 7 days.

- ▶ SHARP CUTTING ANGLE OF TAPE WILL HELP TO EXTRACT A PERFECT LINE
- ▶ PROFESSIONAL TAPE DOES NOT LEAVE ADHESIVE RESIDUES
- ▶ MADE OF SPECIAL JAPANESE WASHI PAPER
- ▶ SUITABLE FOR PAINTING WITH ALL PAINTS
- ▶ UV RESISTANT, SUITABLE USE INSIDE AND OUTSIDE
- ▶ CAN BE UPLIED UP TO 6 MONTHS INSIDE AND 3 MONTHS OUTSIDE
- ▶ SUITABLE FOR USE ON VARIOUS SURFACES

Tape thickness ..... 83 µm  
 Adhesion to steel ..... 0.9 N/cm  
 Application temperature ..... -10 °C ... +90 °C  
 Glue ..... acrylic  
 Paper ..... washi



Color: violet  
 25 mm x 50 m, code 02-5-1-801  
 30 mm x 50 m, code 02-5-1-802  
 38 mm x 50 m, code 02-5-1-803  
 48 mm x 50 m, code 02-5-1-804



## ZOOM MASKING TAPE

For interior painting works and window frame covering.

- ▶ EASILY STICKS TO ALL SURFACES
- ▶ DOES NOT LEAVE GLUE RESIDUE

Tape thickness ..... 73 g/m<sup>2</sup>  
 Adhesion to steel ..... [N/25 mm]: 10,5  
 Application temperature (optimal) ..... +20 °C ... +30 °C  
 Temperature resistance ..... up to +60 °C



Color: white  
 19 mm x 45 m, code 02-5-1-101  
 25 mm x 45 m, code 02-5-1-102  
 30 mm x 45 m, code 02-5-1-103  
 38 mm x 45 m, code 02-5-1-104  
 48 mm x 45 m, code 02-5-1-105

Color: light yellow  
 19 mm x 45 m, code 02-5-1-201  
 25 mm x 45 m, code 02-5-1-202  
 30 mm x 45 m, code 02-5-1-203  
 38 mm x 45 m, code 02-5-1-204  
 48 mm x 45 m, code 02-5-1-205



## ZOOM MASKING TAPE "SUPER GLUE"

For interior and exterior painting works.

- ▶ UV RESISTANT
- ▶ EXCELLENT ADHESION TO METAL, GLASS, PLASTIC, PLASTERED SURFACE
- ▶ DOES NOT LEAVE GLUE RESIDUE AFTER 7 DAYS

Tape thickness ..... 110 µm  
 Adhesion to steel ..... 10,5 H/25 mm  
 Temperature resistance ..... -10 °C ... +60 °C



Color: light yellow  
 25 mm x 50 m, code 02-5-1-501  
 30 mm x 50 m, code 02-5-1-502  
 38 mm x 50 m, code 02-5-1-503  
 48 mm x 50 m, code 02-5-1-504



## ZOOM MASKING TAPE

For interior and exterior painting works.

- ▶ REMOVED WITHOUT TRACES
- ▶ UV RESISTANCE – 30 DAYS
- ▶ FITS ALL TYPES OF PAINT
- ▶ DOES NOT LEAVE GLUE RESIDUE

Tape thickness ..... 110 µm  
 Application temperature (optimal) ..... +20 °C ... +30 °C  
 Temperature resistance ..... up to +95 °C



Color: blue  
 38 mm x 50 m, code 02-5-1-300  
 48 mm x 50 m, code 02-5-1-301





## ZOOM DOUBLE PACKAGE: POLYETHYLENE + TAPE

**Static film for surface protection from paint leaks.** Due to the static properties of the film, it adheres to the surface and effectively protects it. Can be used to protect large surfaces and objects.

- ▶ SAVES TIME
- ▶ FAST AND EASY APPLICATION
- ▶ CAN BE REMOVED WITHOUT TRACE

Tape thickness ..... 125 µm  
Polyethylene thickness ..... 8 µm  
Adhesion to steel ..... [N/25 mm]: 6.5



Color: transparent  
Color: white  
550 mm x 20 m, code 02-5-7-001  
1400 mm x 20 m, code 02-5-7-002  
2700 mm x 20 m, code 02-5-7-003



## 2 IN 1 POLYETHYLENE + ADHESIVE REINFORCED TAPE FOR USE OUTSIDE

**Polyethylene covering with adhesive reinforced tape for outside use, which is convenient to use to cover and protect large areas of the house from paint, dust and other contaminants that can damage the furniture, floors, windows, etc.**

- ▶ EXCELLENT PROTECTES SURFACES
- ▶ EASY TO USE
- ▶ SAVES TIME
- ▶ NO MARKINGS REMOVED
- ▶ RESISTANT TO UV
- ▶ USE OUTSIDE OR INSIDE

Tape thickness ..... 310 µm  
Adhesion to steel ..... > 9.5 N/cm  
Clean peeling ..... after 21 days



Color:  
transparent film, light blue tape  
270 cm x 17 m, code 02-5-7-004



## 2 IN 1 PROTECTIVE PAINTING PAPER WITH ADHESIVE TAPE

**Protective paint paper with adhesive tape that is convenient to use to cover and protect small areas of the house from paint, dust and other contaminants that can damage furniture, floors, windows, etc.** The paper tape is not wide, so it is perfect for masking a small areas near the baseboards, picture frames or for other small painting works that does not requires large surface protection areas. The paper is for indoor use only.

- ▶ EXCELLENT PROTECTES SURFACES
- ▶ EASY TO USE
- ▶ SAVES TIME
- ▶ NO MARKINGS REMOVED
- ▶ FOR INDOOR USE
- ▶ FOR SMOOTH SURFACES

Paper thickness ..... 120 µm  
Adhesion to steel ..... > 4.5 N/cm  
Clean peeling ..... after 2 days



Color:  
beige paper, white tape  
18 cm x 20 m, code 02-5-7-101  
30 cm x 20 m, code 02-5-7-102



## ZOOM PACKING TAPE

For various packing jobs.

- ▶ ACRYLIC GLUE
- ▶ WATER RESISTANT
- ▶ FOR LIGHT BOXES

Application temperature ..... +5 °C ... +60 °C  
Tape thickness ..... 39 µm



Color: transparent  
48 mm x 55 m, code 02-5-2-114



## ZOOM PACKING TAPE

For various packing jobs.

- ▶ HOT MELT GLUE
- ▶ WATER RESISTANT
- ▶ FOR HEAVY BOXES
- ▶ MEDIUM / LONG STORAGE

Application temperature ..... +5 °C ... +60 °C  
Tape thickness ..... 39 µm



Color: transparent  
19 mm x 55 m, code 02-5-2-001  
38 mm x 55 m, code 02-5-2-002  
48 mm x 45 m, code 02-5-2-003  
48 mm x 55 m, code 02-5-2-004  
75 mm x 55 m, code 02-5-2-005  
Color: brown  
48 mm x 55 m, code 02-5-2-006



## ZOOM PACKING TAPE PREMIUM

For various packing jobs.

- ▶ INCREASED CONTENT OF ACRYLIC GLUE
- ▶ SILENT APPLYING
- ▶ FOR HEAVY BOXES
- ▶ FOR MEDIUM / LONG STORAGE
- ▶ WATER RESISTANT

Application temperature ..... -5 °C ... +60 °C  
Tape thickness ..... 46 µm



Color: transparent  
48 mm x 55 m, code 02-5-2-214



# ZOOM MOUNTING TAPES



## Adhesive textile tape

- For floor and carpet applications
- Sticks to rough surfaces
- Resistant to temperature changes



## Adhesive polypropylene tape

- For floor and carpet applications
- Sticks to smooth surfaces
- Resistant to temperature changes



## Adhesive armored tape

- For small repairs at home, garden, construction, car
- Heat resistant up to +60 °C
- Can be torn by hands



## Professional adhesive armored tape

- For repairs at home, garden, construction, car
- Extremely strong adhesives formula
- Application temperature -5 °C to +60 °C
- Can be torn by hands



## Extra strong mounting tape

- Perfectly adheres to smooth and rough surfaces
- Application temperature -10 °C to +75 °C
- For use inside and outside

## ZOOM ALUMINUM TAPE

Used for gluing joints and seams while installing reflective insulation to reduce heat loss, protect from steam penetration, sealing off connection pipeline connection seams, sealing ventilation ducts, hoods and other assemblies.

- ▶ HEAT RESISTANT
- ▶ AIRTIGHT

Basis ..... aluminum foil  
Adhesion ..... 66 µm (without liner)  
Adhesion to steel ..... [N/25 mm]: 12  
Application temperature  
(optimal) ..... -20 °C ... +120 °C



Color: aluminum  
48 mm x 45 m, code 02-5-5-101  
72 mm x 45 m, code 02-5-5-102



## ZOOM ARMORED ALUMINUM TAPE

Reinforced adhesive aluminum tape that impervious the moisture. The tape has extremely strong adhesion properties, excellent thermal insulation properties, suitable for outdoor and indoor use. Reinforced aluminum tape is used to join plates or pipe sections and to lay seams; flexible joining and sealing air duct seams and connections. You can just glue the pipes giving integrity and a beautiful image. The tape reflects light and heat.

- ▶ FOR ALL SURFACES
- ▶ FOR STRENGTHENING DUCTS AND PIPES
- ▶ FOR HEATING AND REFRIGERATION SYSTEMS
- ▶ FOR VENTILATION SYSTEMS
- ▶ FOR AIR CONDITIONING SYSTEMS

Thickness ..... 100 µm  
Adhesion to steel ..... 15 N / 25 mm  
Application temperature ..... -30 °C ... + 80 °C  
Instantaneous temperature  
resistance ..... to 110 °C  
The basis ..... aluminum foil with mesh



Color: aluminum  
48 mm x 45 m, code 02-5-5-201  
72 mm x 45 m, code 02-5-5-202



## ZOOM ADHESIVE MOUNTING TAPE

Double-sided adhesive tape for small object attachment.

- ▶ ATTACH LIGHT OBJECTS TO ALMOST ANY SURFACE, SMOOTH, ROUGH OR EVEN VERTICAL
- ▶ SAVES YOU THE TROUBLE OF USING NAILS AND SCREWS IN MANY SITUATIONS
- ▶ SAFE FOR LACQUERED SURFACES

Tape thickness ..... 900 µm  
Size ..... 19 mm x 1,5 m  
1 m of tape withstands ..... 100 kg



Color: white  
19 mm x 5 m, code 02-5-3-201  
25 mm x 5 m, code 02-5-3-202



## ZOOM POLYPROPYLENE GLUE TAPE

Double-sided adhesive tape for carpets and other floor covers.

- ▶ RIGID ADHESION OF SOLID SURFACES
- ▶ STICKS WELL TO VARIOUS SURFACES
- ▶ WATERPROOF

Basis ..... polypropylene film  
Tape thickness ..... 135 µm



Color: yellow  
48 mm x 5 m, code 02-5-3-001  
48 mm x 10 m, code 02-5-3-002  
48 mm x 25 m, code 02-5-3-003



## ZOOM FABRIC ADHESIVE TAPE

Double-sided adhesive tape for carpets and other floor covers.

- ▶ INCREASED ADHESION AND RESISTANCE TO MOVING
- ▶ HARD AND LONG-TERM ADHESION
- ▶ STICKS WELL TO RIGID SURFACES
- ▶ WATERPROOF

Basis ..... cotton fabric  
Tape thickness ..... 150 µm



Color: yellow  
48 mm x 5 m, code 02-5-3-101  
48 mm x 10 m, code 02-5-3-102  
48 mm x 25 m, code 02-5-3-103



## ZOOM MEGA STRONG DOUBLE-SIDED MOUNTING TAPE

Double-sided adhesive tape for heavy object attachment.

- ▶ EXCELLENT ADHESION TO BOTH ROUGH AND SMOOTH SURFACES
- ▶ NO DRILLING REQUIRED
- ▶ CAN BE DETACHED BY HAND
- ▶ CAN BE USED FOR INTERIOR AND EXTERIOR WORKS

Tape thickness ..... 900 µm  
Size ..... 19 mm x 1,5 m  
1 m of tape withstands ..... 100 kg



Color: white/red  
Code 02-5-3-203



## ZOOM MEGA SLIM

ZOOM Mega slim tape features high tack and heat resistance, which ensures long-term durability. The tape is completely transparent and allows invisible fixing of various materials, such as glass, plexiglass, metal, wood, etc.

- ▶ SUITABLE FOR BONDING ROUGH, UNEVEN SURFACES
- ▶ HIGH RESISTANCE TO SOLVENTS, CHEMICALS, UV AND HEAT
- ▶ SUITABLE FOR USE ON PAINTED SURFACES
- ▶ 100% ADHESION WITHIN 72 HRS.

Basis ..... Acryl  
Adhesion ..... 20 µm  
Application temperature (optimal) ..... -20 °C ... +180 °C



Color: transparent  
9 mm x 25 m, code 02-5-3-303  
9 mm x 50 m, code 02-5-3-305  
19 mm x 25 m, code 02-5-3-311  
19 mm x 50 m, code 02-5-3-313



## ZOOM REINFORCED ADHESIVE TAPE FOR PLASTER WORKS

For interior and exterior use.

- ▶ TAPE IS REMOVED WITHOUT A TRACE
- ▶ EXCELLENTLY PROTECTS THE SURFACE
- ▶ CAN BE TORN BY HAND
- ▶ WATERPROOF

Application temperature ..... -10 °C ... +75 °C  
Tape thickness ..... 170 µm  
Adhesion to steel ..... [N/25 mm]: 20  
Size ..... 48 mm x 33 m



Color: orange  
30 mm x 33 m, code 02-5-1-402  
38 mm x 33 m, code 02-5-1-401  
48 mm x 33 m, code 02-5-1-400



## ZOOM REINFORCED ADHESIVE TAPE

For minor, everyday repairs in your household, garden, construction works or car repairs. For interior and exterior use.

- ▶ PERFECT ADHESIVE TO ALL SURFACES
- ▶ CAN BE RIPPED BY HAND
- ▶ WATER AND FRICTION RESISTANT

Foil thickness ..... 190 µm  
Adhesion to steel ..... [N/25 mm]: 15  
Application temperature (optimal) ..... -5 °C ... +60 °C



Color: grey  
48 mm x 10 m, code 02-5-4-002  
48 mm x 25 m, code 02-5-4-003  
48 mm x 50 m, code 02-5-4-004



# ZCOM

100 x 215 cm


PROFESSIONAL

## All-purpose anti-dust protection

The all-purpose anti-dust curtain is used for separating rooms during renovations.

The curtain prevents dust from penetrating into other unprotected rooms, and thanks to the zipper it allows easy movement between rooms.

Simple and easy installation with dust tightness.

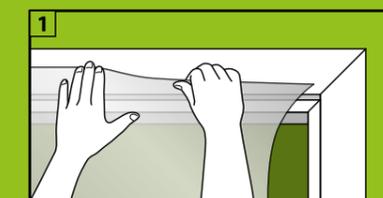

Art. 02-9-0-100

## ZOOM PROFESSIONAL REINFORCED DUCT TAPE

For quick & easy solutions. Perfect for everyday repairs in your household, garden, construction works, car repairs or a favorite hobby doings.

- ▶ STICKS EXCELLENTLY TO RIGID SURFACES
- ▶ FOR INTERIOR AND EXTERIOR USE
- ▶ WATER RESISTANT
- ▶ EASY TO TEAR BY HAND
- ▶ REINFORCED WITH SYNTHETIC FABRIC
- ▶ VERY STRONG, INCREASED ADHESION

Foil thickness ..... 190 µm  
Adhesion to steel ..... ≥ 20 N/25 mm  
Application temperature (optimal) ..... -5 °C ... +60 °C



Color: black  
48 mm × 10 m, code 02-5-4-005  
48 mm × 25 m, code 02-5-4-006  
48 mm × 50 m, code 02-5-4-007



## ZOOM STOP TAPE

**Warning tape.** Used for temporary fencing of repair or emergency areas of the roads or construction sites, open trenches, ditches, repair platforms on communication lines and other hazardous areas.

Tape thickness ..... 35 µm  
Basis ..... polypropylene



Color: yellow  
75 mm × 100 m, code 02-5-5-001



## ZOOM STOP TAPE

**Warning tape.** Used for repairing roads or constructions areas or places where it occurred accident, open trenches, ditches, communication line repair platforms and others temporary enclosure of dangerous places

Tape thickness ..... 35 µm  
Basis ..... polypropylene



Color: red/yellow  
100 mm × 100 m, code 02-5-5-003



## ZOOM BARRIER TAPE

Used for fencing and erecting a temporary barrier around repair or emergency sites, various activities and/or hazardous areas.

Tape thickness ..... 35 µm  
Basis ..... polypropylene




Color: red/white  
75 mm × 100 m, code 02-5-5-002



## ZOOM WARNING TAPE

**Adhesive warning tape is used to mark dangerous places or obstacles.** The tape is noticeable so it can be marked stairs, ramp edges, other dangerous places that require special attention. The tape is adhesive, so it will adhere well to metal, plastic, glass, concrete or other surfaces.



Color: yellow/black  
50 mm × 33 m, code 02-5-5-004



## ZOOM FIBERGLASS TAPE

**The glass cloth mesh is covered with glue, so it sticks to the surface to be repaired faster.** It does not stretch, does not shrink and the grid remains stable. Resistant to many chemicals or solvents. Suitable for filling even the largest holes. The grid provides traction even with rough surfaces due to this tape is distributed in an even initial adhesion.



Color: white  
48 mm × 20 m, code 02-5-6-002  
48 mm × 45 m, code 02-5-6-003  
48 mm × 90 m, code 02-5-6-004  
48 mm × 153 m, code 02-5-6-005  
150 mm × 20 m, code 02-5-6-006




## ZOOM BORDER TAPE

For bathrooms and kitchens.



- ▶ EASILY GLUES ITSELF THROUGHOUT THE WHOLE JOINT
- ▶ STICKS HARD AND RELIABLY TO ALL SURFACES
- ▶ ENVIRONMENTALLY FRIENDLY
- ▶ MOLD RESISTANT

General tape thickness ..... 1200 µm  
Storage conditions .... store without opening the packaging at the following temperature: +15 °C ... +25 °C with maximum humidity of 70%.



Color: white  
62 mm × 3,2 m, code 02-5-5-501  
38 mm × 3,2 m, code 02-5-5-502



## ZOOM CLASSIC ADHESIVE SEALANT TAPE, D

Adhesive sealant tape used for sealing windows and doors.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: white  
Code 02-2-4-101  
Color: black  
Code 02-2-4-102  
Color: brown  
Code 02-2-4-103

Profile size ..... 9 mm x 7,5 mm  
Size of sealed slit ..... (3,0-7,0) mm  
Temperature resistance ..... -40 °C ... +65 °C  
Water permeability ..... < 3%  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
Size ..... 100 m  
Shelf life ..... 18 months



## ZOOM INDUSTRIAL ADHESIVE SEALANT TAPE 12x10, D

Used for sealing garage doors and industrial structures.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: white  
Code 02-2-4-221  
Color: black  
Code 02-2-4-220

Profile size ..... 12 mm x 10 mm  
Size of sealed slit ..... (3,0-8,0) mm  
Water permeability ..... < 3%  
Temperature resistance ..... -40 °C ... +65 °C  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
A reel contains ..... 50 m  
Shelf life ..... 18 months



## ZOOM CLASSIC ADHESIVE SEALANT TAPE, P

Adhesive sealant tape used for sealing windows and doors.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: white  
Code 02-2-4-105  
Color: black  
Code 02-2-4-106  
Color: brown  
Code 02-2-4-107

Profile size ..... 9 mm x 5,5 mm  
Size of sealed slit ..... (3,0-5,0) mm  
Temperature resistance ..... -40 °C ... +65 °C  
Water permeability ..... < 3%  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
Size ..... 100 m  
Shelf life ..... 18 months



## ZOOM INDUSTRIAL ADHESIVE SEALANT TAPE 14x12, D

Used for sealing garage doors and industrial structures.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: white  
Code 02-2-4-211  
Color: black  
Code 02-2-4-210

Profile size ..... 14 mm x 12 mm  
Size of sealed slit ..... (3,0-10,0) mm  
Temperature resistance ..... -40 °C ... +65 °C  
Water permeability ..... < 3%  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
A reel contains ..... 40 m  
Shelf life ..... 18 months



## ZOOM CLASSIC ADHESIVE SEALANT TAPE, E

Adhesive sealant tape used for sealing windows and doors.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: white  
Code 02-2-4-109  
Color: black  
Code 02-2-4-110  
Color: brown  
Code 02-2-4-111

Profile size ..... 9 mm x 4 mm  
Size of sealed slit ..... (2,0-3,5) mm  
Temperature resistance ..... -40 °C ... +65 °C  
Water permeability ..... < 3%  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
Size ..... 150 m  
Expiration period ..... 18 months



## ZOOM INDUSTRIAL ADHESIVE SEALANT TAPE 21x17, D

Used for sealing garage doors and industrial structures.

- ▶ 7 YEAR SYNTHETIC RUBBER MATERIAL ELASTICITY GUARANTEE
- ▶ RESISTANT TO TEMPERATURE SWINGS FROM -40 °C TO +65 °C
- ▶ RESISTANT TO UV RADIATION, WATER AND OZONE



Color: black  
Code 02-2-4-200

Profile size ..... 21 mm x 17 mm  
Size of sealed slit ..... (3,0-13,0) mm  
Temperature resistance ..... -40 °C ... +65 °C  
Water permeability ..... < 3%  
Storage temperature ..... +5 °C ... +25 °C  
Max storage humidity ..... up to 70%  
A reel contains ..... 50 m  
Shelf life ..... 18 months



# RECOMMENDATIONS AND INSTRUCTIONS

## FOAMS

Mounting foams or a single-component foam-polyurethane sealant in an aerosol type package is a universal building material, used for sealing, sound insulation and bonding materials. There is more than a thousand ways of application of this material currently known in construction and other industries.

## MOUNTING FOAM TYPES

### 1. GUN FOAMS

ADVANTAGES OF WORKING WITH FOAM GUN CANISTERS:

- ▶ Accurate dosing
- ▶ Output increased by 20%
- ▶ Timesaving (fast-paced work)
- ▶ Repeated use of one can (cylinder) after long interruptions, since the new valve does not allow gas leaks and the foam can be stored and used for a long time after the initial use.



UNIQUE AND PATENTED "CLICK&GO" SYSTEM




### 2. ADAPTER MOUNTING FOAM

THE "CLICK&GO" ADVANTAGES FOR THE CLIENT INCLUDE:

- ▶ The valve cannot be damaged (twisted too much or broken) during the installation of the adapter.
- ▶ Foam dosage system replaces a professional foam gun.
- ▶ Thanks to the unique valve construction, the gas (needed to push out the foam out of the canister) leakage is significantly reduced.
- ▶ The remainder of the foam does not dry out in the adapter tube, so the tube can be closed many times and the foam can be used many times for up to 2 months (just like the gun foam).
- ▶ Replacing the valve synthetic rubber seal with plastic prevents the diffusion of moisture inside of the canister, thus no film is formed and the valve is not sealed.
- ▶ Can be kept in any position for 24 months.


### 3. GUN/ADAPTER FOAM

The new DOUBLE PISTOL FOAM technology allows you to work with both a simple foam gun and the adapter that comes with the product.

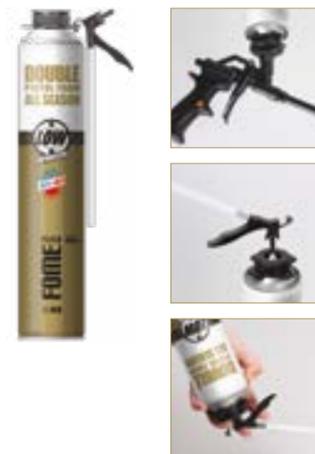

## MOUNTING FOAM USES:

For mounting works (fastening, connection of separate structure parts), sound and heat insulation and sealing.



### WARNING!

Problematic bases (gypsum and old masonry) should be moistened very well.

If the temperature of the environment is below 0 °C, the surface should not be moistened, since the ice on the surface will affect the adhesion of the foam to the base.

Use mounting foam to seal slots from 1 to 5 cm wide. If the slot is wider, "narrow" it down with cheaper materials (wood, brick, plastic, polystyrene). If the slot is smaller than 1 cm, use a sealant or plaster.

Storage conditions: keep the packaging closed, the environment dry and temperature ranging from +5 to +25 °C.

## ADHESIVE QUALITIES

Our foam bonds with all traditional construction materials (wood, rock, concrete, plaster, metal, glass) except for polyethylene, polypropylene, Teflon, silicone and wax.

## PROPERTIES:

- ▶ The foam quickly changes in to a sufficiently solid and chemically stable polyurethane under the influence of moisture.
- ▶ The foam expands when curing (strongly – 2-3 times or slightly 1,5-2 times).
- ▶ It can be used for interior and exterior works.
- ▶ Glues surfaces well and does not conduct electricity. Our foam can be painted and plastered.
- ▶ The foam is not resistant to UV rays.

## EXAMPLES:

- ▶ Mounting and fixing of window and door frames.
- ▶ Fixing insulating and other elements.
- ▶ Sealing areas of adjoining hoods and conditioners, cracks between pipes (sound insulation), sealing cracks in cold premises (heat insulation).
- ▶ Filling cracks and gaps during roofing works, filling spaces around window and door boxes and other constructions.
- ▶ Filling spaces around heating or water pipes, at their joints or bends.


# SEALANTS

The purpose of sealants is sealing and hardening seams and joints.

## SILICONES

### SILICONE SEALANTS ARE USED:

Inside and outside of premises to seal and harden movable, dynamic, temperature seals, cracks and gaps.



### ADHESIVE CAPABILITIES:

Silicone sealants attach to all known construction materials with the exception of polycarbonate, polyethylene, polypropylene, Teflon and PVC. A silicone sealant seam is smoothed with a soap solution.

### CHARACTERISTICS:

- ▶ Exceptional weather resistance
- ▶ UV resistance
- ▶ Possibility of application in a wide temperature range
- ▶ Excellent accommodation of joint moving for no less than 20%
- ▶ Long-term elasticity of joints
- ▶ Resistance to acids, alkalis and seawater
- ▶ Resistance to aging

### EXAMPLES:

- ▶ Sealing sanitary and plumbing equipment
- ▶ Glazing – sealing the joint of the glass and the frame
- ▶ Sealing dynamic, moving joints between the frame and the wall
- ▶ Heat insulation – compensating clearances in the wooden, metallic or concrete constructions
- ▶ Silicone sealants with a neutral vulcanization system can be used as universal ones – they replace almost all types of sealing

#### SILICONE SEALANTS WITH AN ACETATE VULCANIZATION SYSTEM SHOULD NOT BE USED TO SEAL:

- Materials containing cement
- Metals
- Marble and natural stone

### SILICONE USAGE RECOMMENDATIONS

	Fome Flex Neutral	Fome Flex Silicon blister	Fome Flex Aquarium	Fome Flex Silicone	P Plus Silicone
<b>POROUS SURFACES:</b>					
Concrete	Recommended	Recommended	Recommended	Recommended	Recommended
Plaster	Recommended	Recommended	Recommended	Recommended	Recommended
Bricks	Recommended	Recommended	Recommended	Recommended	Recommended
Gypsum boards	Recommended	Recommended	Recommended	Recommended	Recommended
Wood	Recommended	Recommended	Recommended	Recommended	Recommended
Uncoated ceramics (not glossy)	Recommended	Recommended	Recommended	Recommended	Recommended
Ceramic tiles (the back side)	Recommended	Recommended	Recommended	Recommended	Recommended
<b>NON-POROUS SURFACES:</b>					
Glass	Recommended	Recommended	Recommended	Recommended	Recommended
Acryl glass	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Hard PVC	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Enamel	Recommended	Recommended	Recommended	Recommended	Recommended
Glossy ceramics	Recommended	Recommended	Recommended	Recommended	Recommended
Ceramic tile (the front side)	Recommended	Recommended	Recommended	Recommended	Recommended
Steel	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Galvanized steel	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Galvanized tin	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Aluminum	Recommended	Recommended	Recommended	Recommended	Recommended
Anodized aluminum	Recommended	Recommended	Recommended	Recommended	Recommended
Brass	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Bronze / copper	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended

## ACRYLIC SEALANTS

### ACRYLIC SEALANTS ARE USED:

Acrylic sealants are used inside more often than outside, usually to reinforce/seal wall, ceiling and floor joints. They are also used to seal cracks, scratches and gaps during the final stages of finishing works.

### ACRYLIC SEALANTS BOND WITH:


Plaster, wood, concrete bricks, gypsum boards.

### CHARACTERISTICS:

- ▶ Material is plastic and easy to use
- ▶ Odourless
- ▶ You can paint these materials with acrylic and dispersion paints
- ▶ The sealants are UV resistant
- ▶ Ecological
- ▶ Solvent-free

### EXAMPLES OF USE:

- ▶ Sealing joints between the wall and window frame
- ▶ Sealing joints between a wall and the ceiling, prior to painting
- ▶ Reinforcing windowsills, plinths, panel joints
- ▶ Repair of plaster and facade cracks



### ACRYLIC SEALANTS USAGE RECOMMENDATIONS

	Fome Flex Acryl 202	Fome Flex Silacryl	Fome Flex Paintasil	Fome Flex Parquet	P Plus Acryl
<b>POROUS SURFACES:</b>					
Concrete	Recommended	Recommended	Recommended	Recommended	Recommended
Plaster	Recommended	Recommended	Recommended	Recommended	Recommended
Bricks	Recommended	Recommended	Recommended	Recommended	Recommended
Gypsum boards	Recommended	Recommended	Recommended	Recommended	Recommended
Wood	Recommended	Recommended	Recommended	Recommended	Recommended
Ceramic tiles (the back side)	Recommended	Recommended	Recommended	Recommended	Recommended
Natural stone / marble	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Hard PVC	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Ceramics / ceramic tile	Recommended	Recommended	Recommended	Recommended	Recommended
Polystyrol	Recommended	Recommended	Recommended	Recommended	Recommended
Aluminum (anodized)	Recommended	Recommended	Recommended	Recommended	Recommended
Glass	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended
Bitumen surfaces	Not recommended	Not recommended	Not recommended	Not recommended	Not recommended

#### NOT USED:

- For sanitary unit sealing,
- For seams, which are exposed to water for a prolonged period of time,
- For movable joint connections.

# ADHESIVES

Adhesives are natural or synthetic substances, used to connect two identical or different surfaces to each other.

## TYPES OF ADHESIVES

### RUBBER ADHESIVES

Rubber adhesives are a solution of rubber and synthetic resin with a solvent. Synthetic rubber is used as a raw material in the production of these adhesives. Hardens by evaporation of the solvent. Provides a strong and flexible connection that is protected from oil, water, vibration and shock.

### ACRYLIC ADHESIVES

Acrylic adhesives are a suspension of certain polymers dissolved in water or in organic compounds. Gradually as water evaporates, happen certain modifications which make the material harden and acquire a special stiffness. The joint is sturdy but has little elasticity. The glue is almost odourless and completely non-aggressive to sensitive surfaces.

### MS POLYMER ADHESIVES

MS Polymer adhesive is innovative sealant and adhesive with a specific fast curing formula for controlled polymer networking. They are flexible adhesives that cure with moisture. They are ideal for applications that require a high degree of resilience and excellent environmental resistance. Odourless and completely non-aggressive to any surfaces. Waterproof. Mostly has good primary adhesion and can also be used as a sealant.

### POLYURETHANE FOAM-ADHESIVE

Polyurethane foam is a mixture of isocyanate and polyol with the addition of various catalysts, foaming additives and stabilizers. These glues are commonly used for gluing insulation materials, but may be also used to fasten other building elements.

### POLYURETHANE ADHESIVE AND SEALANT

Viscous polymer material based on a synthetic elastomer. Adhesive and sealant based on polyurethane and polymeric components is a new generation of materials. Their use can significantly improve the quality and reliability of waterproofing for cracks, seams and most vulnerable areas.

### WHERE SHOULD YOU PAY THE MOST ATTENTION WHILE CHOOSING YOUR GLUE?

- ▶ Material, aesthetics and ecology
- ▶ The characteristics of the surface
- ▶ Conditions of the joint usage
- ▶ Type and area of glued surface
- ▶ Bonding strength and joint load
- ▶ Glue solidification time

## APPLICATION OF SOLVENT-BASED MOUNTING GLUE

Proper application



Dots

Stripes

Other

Wrong application



The space for sealant evaporation is closed off!

## GLUE USAGE RECOMMENDATIONS

	Point glue 91	Point glue 92	Point glue 93	Point glue 94	Point glue 95	Point glue 96	PPoint glue 97	PPoint glue 98	Point glue 99	Point glue 100	POINT 103	POINT HIGH TACK
<b>POROUS SURFACES:</b>												
Concrete	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Plaster	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Bricks	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Gypsum boards	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Wood / MDF	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Non-coated ceramics	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Ceramic tile (back side)	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended	Recommended
Polystyrene / panels	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Non-porous rocks	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
<b>NON-POROUS SURFACES:</b>												
Glass / mirrors	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Acryl glass	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Hard PVC	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Hard PVC	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Aluminum	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Glossy ceramics	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						
Ceramic tiles (front side)	Not recommended	Recommended	Not recommended	Recommended	Not recommended	Recommended						



# ADHESIVE SEALANT TAPE

Our tape is made out of soft, porous EPDM synthetic rubber (synthetic ethylene-propylene rubber) to protect your premises from wind, cold, moisture, noise, dust, pollen, insects, exhaust gasses and heat.



## ADHESIVE SEALING TAPES

Our tape is made of soft, porous EPDM synthetic rubber (synthetic ethylene and propylene rubber) to protect your accommodation from wind, cold, moisture, noise, dust, pollen, insects, exhaust fumes and heat.

## MASKING - PAINTING TAPES

Important factors when choosing a masking-painting tape:

- ▶ Where will we used tape?
- ▶ Will we mask the surfaces that need to stay clean or will we paint the ornaments on the wall?
- ▶ Will you paint outside or inside?

	Masking tape	Masking tape SUPER GLUE	Masking tape for outside blue	Masking tape PRECISION	Masking tape SENSITIVE SURFACES
For masking surfaces that need to stay clean	+	+	+	+	+
For painting ornaments, lines		+		++	++
Inside	+	+	+	+	+
Outside			++	+	+
Hot-melt glue	+	+			
Acrylic glue			+	+	+
Crepe paper	+	+	+		
Washi paper				+	+

## ADHESIVES

Hot-melt glue is more sticky compare to acrylic glue, so acrylic glue is designed for tape is glued to the wall to prevent from peeling off. Aggressive hot-melt glue is for gluing on surfaces we want to keep clean (door edgings, metal, edges of plastic windows, etc.)

## PAPER

The crepe paper is roughened. Washi paper tape has more straight cut. Washi tape is more suitable for extracting a smooth, precise line during the painting. Washi tape is smooth and more impregnated, so the paint will never run under the bottom of tape. Crepe paper is also impregnated to absorb paint.

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4772012003640	4772012003657	03-1-0-100	Montage glue 100 Connects Everything, POINT	290 ml	12
4772012009116	4772012009123	03-4-0-115	Ms Polymer 103 HYBRI FIX STONE, POINT	290ml	12
4772012006870	4772012006887	03-4-0-109	SMP Polymer glue 104 TURBO POWER FIX, POINT	290 ml	12
4772012009116	4772012009123	3-4-0-115	Ms Polymer POINT 105 HYBRI FIX MARINE, POINT	290 ml	12
4772012005590	4772012005606	03-4-0-106	Acrylic glue 200 ACRYL TACK INTERIOR, white, POINT	300 ml	12
4772012008737	4772012008744	03-4-0-200	Acrylic glue 200 ACRYL TACK INTERIOR, white, POINT	80 ml	8
4772012006214	4772012006221	03-4-0-201	Strong and elastic adhesive and sealant 203 FOLIE & MEMBRANE FIX, POINT	300 ml	12
4772012007303	4772012007310	03-4-0-204	Acrylic glue 204 D3 WOOD FIX ADHESIVE, POINT	500 ml	12
4772012009192	4772012009208	3-4-0-207	Acrylic glue 204 D3 WOOD FIX ADHESIVE, POINT	1000 ml	6
4772012006191	4772012006207	03-4-0-301	Polyurethane-based adhesive 301 WOOD & METAL FIX, POINT	300 ml	12
4772012001196	4772012001202	03-4-0-105	MS Polymer glue HIGH TACK EXPRESS, white, POINT	290 ml	12
4772012005613	4772012005620	03-4-0-107	Ms Polymer HIGH TACK EXPRESS, black, POINT	290 ml	12
4772012005637	4772012005644	03-4-0-108	MS Polymer glue HIGH TACK EXPRESS, grey, POINT	290 ml	12
4772012008225	4772012008232	03-2-0-416	Two-component styrene-free polyester chemical anchor 416 POLY FIX, POINT	300 ml	15
4772012008249	4772012008256	03-2-0-430	Two-component styrene-free vinylester chemical anchor 430 VINYL FIX, POINT	300 ml	15
4772012009130	4772012009147	03-4-0-501	Multi-purpose adhesive kit 501 FIX EXPRESS, POINT	100 ml+ 25 g	24
4772012007389	4772012007396	03-1-0-292	Montage glue 92 – polystyrene adhesive, white, POINT	280 ml	12
4772012007464	4772012007471	03-1-0-293	Montage glue 93 – mirror glue, beige, POINT	280 ml	12
4772012007426	4772012007433	03-1-0-295	Montage glue 95 – wooden constructions, transparent, POINT	250 ml	12
4772012007327	4772012007334	03-1-0-296	Montage glue 96 – crystal-clear glue, transparent, POINT	280 ml	12
4772012007648	4772012007655	03-1-0-496	Montage glue 96 – crystal-clear glue, transparent, POINT	80 ml	10
4772012007488	4772012007495	03-1-0-297	Montage glue 97 glue and bull floating for paving tiles, POINT	280 ml	12
4772012007402	4772012007419	03-1-0-298	Montage glue 98 – all-season and extra fast, beige, POINT	280 ml	12
4772012007327	4772012007334	03-1-0-299	Montage glue 99 – extra strong glue, beige, POINT	280 ml	12
4772012007662	4772012007679	03-1-0-499	Montage glue 99 – extra strong glue, beige, POINT	80 ml	10
4779027534480	4779027534497	03-0-0-041	Adapter foam-glue PENOPLAST, POINT	780 g	12
4779027534466	4779027534473	03-0-0-042	Foam-glue for foam guns PENOPLAST, POINT	780 g	12
4779027538068	4779027538075	01-2-1-003	Caulking gun, POINT	-	40
4772012003725	-	01-2-1-006	Strengthened caulking gun High Tack, POINT	-	12
4772012001073	4779027537955	01-2-0-204	Foam gun, POINT	-	20
4772012004739	4772012004746	01-3-2-011	Mounting foam 7 DOORS&WINDOWS, Fome Flex	750 ml	12
4772012005033	4772012005040	01-3-2-012	Mounting foam FAST CUT 75L PISTOL FOAM, Fome Flex	870 ml	12
4772012005057	4772012005064	01-3-2-015	Glue-mounting foam 60 SECONDS, Fome Flex	850 ml	12
4772012005941	4772012005958	01-3-2-018	Glue-mounting foam 60 SECONDS, Fome Flex	750 ml	12
4772012005163	4772012005170	01-3-2-016	Pistol mounting foam, "Fire Block Pistol Foam", Fome Flex	750 ml	12
4772012005965	4772012005972	01-3-2-019	FOME FLEX BITUMEN FIX FOAM	750 ml	12
4779027539324	4779027539348	01-3-2-008	Pistol foam, Double Pistol Foam All Season, Fome Flex	750 ml	12
4779027539317	4779027539331	01-3-2-009	Pistol foam, All Season Mega Pistol Foam 65 L, Fome Flex	870 ml	12

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4779027534527	4779027534572	01-3-2-003	Pistol mounting foam, "Mega Pistol Foam 65 L", Fome Flex	890 ml	12
4779027536835	4779027536842	01-3-2-006	Mounting foam All season use, Fome Flex	750 ml	12
4779027539652	4779027539669	01-3-2-007	Mini mounting foam, Fome Flex	230 ml	12
4772012001936	4772012001943	01-0-2-004	Foam Cleaner, Fome Flex	500 ml	12
4772012008515	4772012008522	01-0-2-043	Universal cleaner Multicleaner, Fome Flex	400 ml	12
4772012005927	4772012005934	24-0-1-001	Wet wipes with abrasive, Fome Flex		6
4772012007686	4772012007693	01-4-2-018	Neutral Premium silicone sealant GLAZING & FACADE, Fome Flex	310 ml	12
4772012009024	4772012009031	01-4-2-045	100% SILICONE, transparent, Fome Flex	310 ml	12
4772012009024	4772012009031	01-4-2-046	100% SILICONE, white, Fome Flex	310 ml	12
4779027534602	4779027534671	01-4-1-101	Silicone sealant, SANITARY SILICON 102, transparent, Fome Flex	310 ml	12
4779027534619	4779027534688	01-4-1-102	Silicone sealant, SANITARY SILICON 102, white, Fome Flex	310 ml	12
4779027534626	4779027534695	01-4-1-103	Silicone sealant, SANITARY SILICON 102, black, Fome Flex	310 ml	12
4779027534633	4779027534701	01-4-1-104	Silicone sealant, SANITARY SILICON 102, beige, Fome Flex	310 ml	12
4779027534640	4779027534718	01-4-1-105	Silicone sealant, SANITARY SILICON 102, brown, Fome Flex	310 ml	12
4779027534657	4779027534725	01-4-1-106	Silicone sealant, SANITARY SILICON 102, grey, Fome Flex	310 ml	12
4772012000106	4772012000144	01-4-2-002	Neutral silicone, transparent, NEUTRAL, Fome Flex	300 ml	12
4779027539997	4772012000137	01-4-2-001	Neutral silicone, white, NEUTRAL, Fome Flex	300 ml	12
4772012008119	4772012008126	01-4-2-035	Polyurethane sealant SEAL & FLEX, grey, Fome Flex	300 ml	12
4779027539874	4779027539935	01-4-2-005	Fish tank silicone, transparent, Aquarium, Fome Flex	300 ml	12
4772012000113	4772012000151	01-4-2-006	High temp. silicone, red, 315 °C, Thermo, Fome Flex	300 ml	12
4772012000120	4772012000168	01-4-2-007	Heat resistant sealant, black, 1500 °C, Kamin, Fome Flex	300 ml	12
4779027534749	4779027534756	01-5-1-101	Acrylic sealant, ACRYL 202, white, Fome Flex	310 ml	12
4772012006023	4772012006030	01-5-1-102	Acrylic sealant, ACRYL 202, grey, Fome Flex	310 ml	12
4779027539676	4779027539690	01-4-2-003	Silicone/acryl sealant, white, Silacryl, Fome Flex	300 ml	12
4779027539683	4779027539706	01-4-2-004	Silicone/acryl sealant, transparent, Silacryl, Fome Flex	300 ml	12
4779027539881	4779027539942	01-4-2-020	Wood sealant, Parquet, pine Fome Flex	300 ml	12
4779027539898	4779027539959	01-4-2-021	Wood sealant, Parquet, oak, Fome Flex	300 ml	12
4779027539904	4779027539966	01-4-2-022	Wood sealant, Parquet, beech Fome Flex	300 ml	12
4779027539911	4779027539973	01-4-2-023	Wood sealant, Parquet, cherry, Fome Flex	300 ml	12
4779027539928	4779027539980	01-4-2-024	Wood sealant, Parquet, mahogany Fome Flex	300 ml	12
4772012001172	4772012001189	01-4-2-014	Acrylic super-light putty Finish, white, Fome Flex	300 ml	12
4772012005224	4772012005231	01-4-2-025	Paintable silicone Paintasil, white, Fome Flex	310 ml	12
4772012008775	4772012008782	01-4-2-038	Sealant for outdoor Hybrid Roof & Façade, grey Fome Flex	300 ml	12
4779027539386	4779027539447	01-4-2-009	Rubber sealant with fibers, transparent, Aquastop, Fome Flex	300 ml	12
4779027539379	4779027539430	01-4-2-008	Bituminous sealant, black, Bitumen, Fome Flex	300 ml	12
4779027539393	4779027539454	01-4-2-010	Rubber sealant, transparent, Kauchuk, Fome Flex	300 ml	12
4779027539409	4779027539454	01-4-2-011	Rubber sealant, black, Kauchuk, Fome Flex	300 ml	12
4779027539416	4779027539454	01-4-2-012	Rubber sealant, brown, Kauchuk, Fome Flex	300 ml	12
4779027539423	4779027539454	01-4-2-013	Rubber sealant, red, Kauchuk, Fome Flex	300 ml	12
4772012005248	4772012005255	01-4-2-015	Rubber sealant, anthracite, Kauchuk, Fome Flex	300 ml	12

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4772012006283	4772012006290	01-4-2-017	Rubber sealant, transparent, Kauchuk ALL Season, Fome Flex	300 ml	12
4772012008812	-	01-4-2-047	Rapid Hydro Defence Primer,	9 kg	-
4772012008829	-	01-4-2-048	Rapid Hydro Defence Primer,	18 kg	-
4772012008836	-	01-4-2-049	Rapid Hydro Defence Mastic	9 kg	-
4772012008843	-	01-4-2-050	Rapid Hydro Defence Mastic	18 kg	-
4772012008850	-	01-4-2-051	Rapid Hydro Defence Filler	5 kg	-
4772012008867	-	01-4-2-052	Rapid Hydro Defence Filler	9 kg	-
4772012008874	-	01-4-2-053	Rapid Hydro Defence Filler	18 kg	-
4779027537931	4779027537962	01-2-0-202	Mounting foam gun MEGA, Fome Flex	-	20
4779027537948	4779027537979	01-2-0-203	Mounting foam gun black EDITION, Fome Flex	-	20
4779027538044	4779027538051	01-2-1-002	Sealant gun, Fome Flex	-	24
4779027538624	4779027538624	01-2-1-004	Caulking gun BLACK Edition , Fome Flex	-	20
4772012003732	-	01-2-1-007	Professional gun for sealants, Fome Flex Profi	-	12
4779027531052	4779027531069	01-0-0-032	Pistol foam, all season, Pplus	650 g	12
4779027533667	4779027533674	01-0-0-034	Pistol foam, Mega 65 L, all season, Pplus	820 ml	12
4750696020863	4750696021204	01-0-0-031	Mounting foam, all season, Pplus	600 g	12
4779027532677	4779027532684	01-4-1-072	Silicone sealant, Silicone, transparent, Pplus	260 ml	20
4779027532653	4779027532660	01-4-1-071	Silicone sealant, Silicone, white, Pplus	280 ml	20
4779027537702	4779027537719	01-4-1-074	Silicone sealant, Silicone, transparent, Pplus	50 ml	20
4779027537726	4779027537733	01-4-1-073	Silicone sealant, Silicone, white, Pplus	50 ml	20
4779027532691	4779027532707	01-5-1-041	Acrylic sealant, Acryl, white, Pplus	280 ml	20
4779027531113	4779027531120	01-2-0-162	Mounting foam gun, Pplus	-	20
4772012001080	4772012001080	01-2-1-005	Caulking gun, Pplus	-	20
4772012004043	4772012004326	02-5-1-601	Professional painting tape, 30 mm x 50 m, PRECISION, ZOOM	50	40
4772012004050	4772012004333	02-5-1-602	Professional painting tape, 38 mm x 50 m, PRECISION, ZOOM	50	32
4772012006245	4772012006252	02-5-1-603	Professional painting tape, 48 mm x 50 m, PRECISION, ZOOM	50	24
4772012007792	4772012007808	02-5-1-801	Professional painting tape, 25 mm x 50 m, SENSITIVE PLUS, ZOOM	50	48
4772012007815	4772012007822	02-5-1-802	Professional painting tape, 30 mm x 50 m, SENSITIVE PLUS, ZOOM	50	40
4772012007839	4772012007846	02-5-1-803	Professional painting tape, 38 mm x 50 m, SENSITIVE PLUS, ZOOM	50	32
4772012007853	4772012007860	02-5-1-804	Professional painting tape, 48 mm x 50 m, SENSITIVE PLUS, ZOOM	50	24
4779027537191	4779027537207	02-5-1-101	Masking tape, white, 19 mm x 45 m, ZOOM	45	48
4779027537214	4779027537214	02-5-1-102	Masking tape, white, 25 mm x 45 m, ZOOM	45	36
4779027537238	4779027537245	02-5-1-103	Masking tape, white, 30 mm x 45 m, ZOOM	45	32
4779027537252	4779027537269	02-5-1-104	Masking tape, white, 38 mm x 45 m, ZOOM	45	24
4779027537276	4779027537283	02-5-1-105	Masking tape, white, 48 mm x 45 m, ZOOM	45	24
4779027537290	4779027537306	02-5-1-201	Masking tape, yellow, 19 mm x 45 m, ZOOM	45	48
4779027537313	4779027537320	02-5-1-202	Masking tape, yellow, 25 mm x 45 m, ZOOM	45	36
4779027537337	4779027537344	02-5-1-203	Masking tape, yellow, 30 mm x 45 m, ZOOM	45	32
4779027537351	4779027537368	02-5-1-204	Masking tape, yellow, 38 mm x 45 m, ZOOM	45	24
4779027537375	4779027537382	02-5-1-205	Masking tape, yellow, 48 mm x 45 m, ZOOM	45	24

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4772012005347	4772012005354	02-5-1-501	Masking tape, yellow, 25 mm x 50 m, "Super glue", ZOOM	50	36
4772012002674	4772012002735	02-5-1-502	Masking tape, yellow, 30 mm x 50 m, "Super glue", ZOOM	50	28
4772012002681	4772012002742	02-5-1-503	Masking tape, yellow, 38 mm x 50 m, "Super glue", ZOOM	50	24
4772012002698	4772012002759	02-5-1-504	Masking tape, yellow, 48 mm x 50 m, "Super glue", ZOOM	50	24
4779027539232	4772012004470	02-5-1-300	Masking tape for outdoor, blue, 38 mm x 50 m, ZOOM	50	32
4779027537825	4779027537832	02-5-1-301	Masking tape for outdoor, blue, 48 mm x 50 m, ZOOM	50	24
4772012004869	4772012004906	02-5-7-004	Static film for surface protection with reinforced tape, for outdoor, 270 cm x 17 m, ZOOM	17	30
4772012004852	4772012004883	02-5-7-101	2 IN 1 PROTECTIVE PAINTING PAPER WITH ADHESIVE TAPE, 18 cm x 20 m, ZOOM	20	75
4772012004876	4772012004890	02-5-7-102	2 IN 1 PROTECTIVE PAINTING PAPER WITH ADHESIVE TAPE, 30 cm x 20 m, ZOOM	20	25
4779027537849	4779027537856	02-5-5-101	Aluminum tape 48 mm x 45 m, ZOOM	45	24
4779027537863	4779027537870	02-5-5-102	Aluminum tape 72 mm x 45 m, ZOOM	45	16
4772012004777	4772012004784	02-5-5-201	Armored aluminum tape, 48 mm x 45 m, ZOOM	45	24
4772012005453	4772012005460	02-5-5-202	Armored aluminum tape, 72 mm x 45 m, ZOOM	45	16
4779027539638	4779027539645	02-5-3-203	MEGA STRONG double-sided adhesive mounting tape, 19 mm x 1.5 m, ZOOM	15	50
4772012008270	4772012008287	02-5-3-303	High adhesion double- sided tape MEGA SLIM, 9 mm x 25 m, ZOOM	25	48
4772012008317	4772012008324	02-5-3-305	High adhesion double- sided tape MEGA SLIM, 9 mm x 50m, ZOOM	50	48
4772012008294	4772012008300	02-5-3-311	High adhesion double- sided tape MEGA SLIM, 19 mm x 25 m, ZOOM	25	36
4772012008331	4772012008348	02-5-3-313	High adhesion double- sided tape MEGA SLIM, 19 mm x 50 m, ZOOM	50	36
4779027537887	4779027537894	02-5-3-201	Adhesive mounting tape, 19 mm x 5 m, ZOOM	5	48
4779027537900	4779027537917	02-5-3-202	Adhesive mounting tape, 25 mm x 5 m, ZOOM	5	36
4779027537078	4779027537085	02-5-3-001	Double-sided polypropylene glue tape, 48 mm x 5 m, ZOOM	5	36
4779027537092	4779027537108	02-5-3-002	Double-sided polypropylene glue tape, 48 mm x 10 m, ZOOM	10	36
4779027537115	4779027537122	02-5-3-003	Double-sided polypropylene glue tape, 48 mm x 25 m, ZOOM	25	36
4779027537139	4779027537146	02-5-3-101	Double-sided fabric glue tape, 48 mm x 5 m, ZOOM	5	36
4779027537153	4779027537160	02-5-3-102	Double-sided fabric glue tape, 48 mm x 10 m, ZOOM	10	36
4779027537177	4779027537184	02-5-3-103	Double-sided fabric glue tape, 48 mm x 25 m, ZOOM	25	36
4779027537764	4779027537771	02-5-4-002	Reinforced adhesive tape, 48 mm x 10 m, grey, ZOOM	10	36
4779027537788	4773027537795	02-5-4-003	Reinforced adhesive tape, 48 mm x 25 m, grey, ZOOM	25	36
4779027537801	4779027537818	02-5-4-004	Reinforced adhesive tape, 48 mm x 50 m, grey, ZOOM	50	36
4772012002216	4772012002216	02-5-4-005	Professional reinforced adhesive tape, 48 mm x 10 m, black, ZOOM	10	30
4772012002223	4772012002223	02-5-4-006	Professional reinforced adhesive tape, 48 mm x 25 m, black, ZOOM	25	24
4772012002230	4772012002230	02-5-4-007	Professional reinforced adhesive tape, 48 mm x 50 m, black, ZOOM	50	24
4779027539522	4779027539539	02-5-1-400	Reinforced adhesive tape for plaster works, 48 mm x 33 m, ZOOM	33	36
4772012004692	4772012004708	02-5-1-401	Reinforced adhesive tape for plaster works, 38 mm x 33 m, ZOOM	33	48
4772012005361	4772012005378	02-5-1-402	Reinforced adhesive tape for plaster works, 30 mm x 33 m, ZOOM	33	60
4779027536910	4779027536927	02-5-5-001	STOP tape, "STOP" 75 mm x 100 m, yellow, ZOOM	100	24

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4779027536934	4779027536941	02-5-5-002	BARRIER tape, 75 mm x 100 m, red / white, ZOOM	100	24
4772012003848	4772012003855	02-5-5-003	STOP tape, 100 mm x 100 m, yellow / red, ZOOM	100	18
4772012004715	4772012004722	02-5-5-004	BARRIER glue tape, 50 mm 33 m, black / yellow, ZOOM	33	36
4772012006269	4772012006276	02-9-0-100	All purpose anti-dust curtain, 100 cm x 215 cm, ZOOM	-	25
4779027537511	4779027537528	02-5-6-002	Fiberglass tape, 48 mm x 20 m, ZOOM	20	60
4779027537535	4779027537542	02-5-6-003	Fiberglass tape, 48 mm x 45 m, ZOOM	45	36
4779027537559	4779027537566	02-5-6-004	Fiberglass tape, 48 mm x 90 m, ZOOM	90	24
4779027537573	4779027537580	02-5-6-005	Fiberglass tape, 48 mm x 153 m, ZOOM	153	12
4779027537993	4779027538013	02-5-5-501	Border tape, 19 mm x 19 mm, white, knife included, ZOOM	32	16
4779027537986	4779027538006	02-5-5-502	Border tape, 31 mm x 31 mm, white, knife included, ZOOM	32	14
4772012003831	4772012004142	02-5-2-114	Acrylic packaging tape, 48 mm x 55 m, transparent, ZOOM	55	36
4779027536958	4779027536965	02-5-2-001	Packaging tape, 19 mm x 55 m, transparent, ZOOM	55	96
4779027536972	4779027536989	02-5-2-002	Packaging tape, 38 mm x 55 m, transparent, ZOOM	55	48
4779027536996	4779027537009	02-5-2-003	Packaging tape, 48 mm x 45 m, transparent, ZOOM	45	36
4779027537030	4779027537047	02-5-2-004	Packaging tape, 48 mm x 55 m, transparent, ZOOM	55	36
4779027537016	4779027537023	02-5-2-005	Packaging tape, 75 mm x 55 m, transparent, ZOOM	55	24
4779027537054	4779027537061	02-5-2-006	Packaging tape, 48 mm x 55 m, brown, ZOOM	55	36
4772012005385	4772012005392	02-5-2-214	Packaging tape, 48 mm x 55m, PREMIUM, transparent, ZOOM	55	36
4773027539461	4779027539478	02-5-7-001	Static film for surface protection with masking tape, 550 mm x 20 m, ZOOM	20	60
4779027539485	4779027539492	02-5-7-002	Static film for surface protection with masking tape, 1400 mm x 20 m, ZOOM	20	30
4779027539508	4779027539515	02-5-7-003	Static film for surface protection with masking tape, 2700 mm x 20 m, ZOOM	20	20
4779027537597	4779027537603	02-5-6-006	Fiberglass tape, 150 mm x 20 m, ZOOM	20	24
4772012003800	4772012003817	02-5-6-011	Fiberglass strip 50 mm x 25 m, ZOOM	25	40
4779027536101	4779027536095	02-2-4-101	Adhesive sealant tape "D", white, Classic ZOOM	100	6
4779027536125	4779027536118	02-2-4-102	Adhesive sealant tape "D", black, Classic ZOOM	100	6
4779027536149	4779027536132	02-2-4-103	Adhesive sealant tape "D", brown, Classic ZOOM	100	6
4779027538136	4779027538273	02-2-4-105	Adhesive sealant tape "P", white, Classic ZOOM	100	6
4779027538143	4779027538280	02-2-4-106	Adhesive sealant tape "P", black, Classic ZOOM	100	6
4779027538150	4779027538297	02-2-4-107	Adhesive sealant tape "P", brown, Classic ZOOM	100	6
4779027538167	4779027538303	02-2-4-109	Adhesive sealant tape "E", white, Classic ZOOM	150	9
4779027538174	4779027538310	02-2-4-110	Adhesive sealant tape "E", black, Classic ZOOM	150	9
4779027538181	4779027538327	02-2-4-111	Adhesive sealant tape "E", brown, Classic ZOOM	150	9
4779027538198	4779027538334	02-2-4-200	Adhesive sealant tape "D", black, 21 mm x 17 mm, Industrial ZOOM	50	1
4779027538204	4779027538341	02-2-4-210	Adhesive sealant tape "D", black, 14 mm x 12 mm, Industrial ZOOM	40	6
4779027538211	4779027538358	02-2-4-211	Adhesive sealant tape "D", white, 14 mm x 12 mm, Industrial ZOOM	40	6
4779027538228	4779027538365	02-2-4-220	Adhesive sealant tape "D", black, 12 mm x 10 mm, Industrial ZOOM	50	6
4779027538235	4779027538372	02-2-4-221	Adhesive sealant tape "D", white, 12 mm x 10 mm, Industrial ZOOM	50	6
4779027535197	4779027535203	26-7-6-002	(02) INRAL UNIVERSAL RAL9003, Signal white, glossy, spray	400 ml	12

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4779027535210	4779027535221	26-7-6-003	(03) INRAL UNIVERSAL RAL9003, Signal white, matte, spray	400 ml	12
4779027535234	4779027535241	26-7-6-004	(04) INRAL UNIVERSAL RAL9017, Traffic black, glossy, spray	400 ml	12
4779027535258	4779027535265	26-7-6-005	(05) INRAL UNIVERSAL RAL9011, Graphite black, matte, spray	400 ml	12
4779027535272	4779027535289	26-7-6-006	(06) INRAL UNIVERSAL RAL7046, Telegrey 2, glossy, spray	400 ml	12
4779027535296	4779027535302	26-7-6-007	(07) INRAL UNIVERSAL RAL7024, Graphite grey, glossy, spray	400 ml	12
4779027535319	4779027535326	26-7-6-008	(08) INRAL UNIVERSAL RAL1001, Beige, glossy, spray	400 ml	12
4779027535333	4779027535340	26-7-6-010	(10) INRAL UNIVERSAL RAL8016, Mahogany brown, glossy, spray	400 ml	12
4772012005286	4772012005293	26-7-6-011	(11) INRAL UNIVERSAL RAL7016, Anthracite grey, satin mat., spray	400 ml	12
4772012007501	4772012007518	26-7-6-012	(12) INRAL UNIVERSAL RAL7016, Anthracite grey, glossy, spray	400 ml	12
4779027535357	4779027535364	26-7-6-013	(13) INRAL UNIVERSAL RAL2004, Pure orange, glossy, spray	400 ml	12
4772012007525	4772012007532	26-7-6-014	(14) INRAL UNIVERSAL RAL3020, Traffic red, glossy, spray	400 ml	12
4779027535371	4779027535388	26-7-6-015	(15) INRAL UNIVERSAL RAL8017, Chocolate brown, glossy, spray	400 ml	12
4779027535395	4779027535401	26-7-6-016	(16) INRAL UNIVERSAL RAL3011, Brown red, glossy, spray	400 ml	12
4772012005262	4772012005279	26-7-6-017	(17) INRAL UNIVERSAL RAL8017, Chocolate brown, satin mat., spray	400 ml	12
4779027535432	4779027535449	26-7-6-019	(19) INRAL UNIVERSAL RAL8029, Pearl copper, glossy, spray	400 ml	12
4779027535456	4779027535463	26-7-6-020	(20) INRAL UNIVERSAL RAL1036, Pearl gold, glossy, spray	400 ml	12
4779027535470	4779027535487	26-7-6-021	(21) INRAL UNIVERSAL RAL9006, Aluminium, glossy, spray	400 ml	12
4779027535517	4779027535524	26-7-6-023	(23) INRAL UNIVERSAL RAL3004, Purple red, glossy, spray	400 ml	12
4779027535531	4779027535548	26-7-6-024	(24) INRAL UNIVERSAL RAL3002, Carmine red, glossy, spray	400 ml	12
4779027535616	4779027535609	26-7-6-030	(30) INRAL UNIVERSAL RAL5012, Light blue, glossy, spray	400 ml	12
4779027535630	4779027535623	26-7-6-031	(31) INRAL UNIVERSAL RAL5010, Gentian blue, glossy, spray	400 ml	12
4779027535654	4779027535647	26-7-6-032	(32) INRAL UNIVERSAL RAL5002, Ultramarine blue, glossy, spray	400 ml	12
4779027535678	4779027535685	26-7-6-033	(33) INRAL UNIVERSAL RAL5022, Night blue, glossy, spray	400 ml	12
4779027535692	4779027535708	26-7-6-034	(34) INRAL UNIVERSAL RAL6009, Fir green, glossy, spray	400 ml	12
4779027535715	4779027535722	26-7-6-035	(35) INRAL UNIVERSAL RAL6029, Mint green, glossy, spray	400 ml	12
4779027535777	4779027535784	26-7-6-038	(38) INRAL UNIVERSAL RAL1028, Melon yellow, glossy, spray	400 ml	12
4779027535791	4779027535807	26-7-6-039	(39) INRAL UNIVERSAL RAL1018, Zinc yellow, glossy, spray	400 ml	12
4779027535814	4779027535821	26-7-6-040	(40) INRAL UNIVERSAL RAL1003, Signal yellow, glossy, spray	400 ml	12
4779027535838	4779027535845	26-7-6-041	(41) INRAL UNIVERSAL RAL6005, Moss green, glossy, spray	400 ml	12
4779027535890	4779027535906	26-7-6-044	(44) INRAL UNIVERSAL RAL3000, Flame red, glossy, spray	400 ml	12
4772012007549	4772012007556	26-7-6-045	(45) INRAL UNIVERSAL RAL9005, Jet black, glossy, spray	400 ml	12
4772012007563	4772012007570	26-7-6-046	(46) INRAL UNIVERSAL RAL9005, Jet black, matte, spray	400 ml	12
4772012007778	4772012007761	26-7-6-047	(47) INRAL UNIVERSAL RAL7001, Silver grey, glossy, spray	400 ml	12
4779027535951	4779027535968	26-7-6-049	(49) INRAL UNIVERSAL RAL9010, Pure white, matte, spray	400 ml	12
4779027535937	4779027535944	26-7-6-050	(50) INRAL UNIVERSAL RAL9010, Pure white, glossy, spray	400 ml	12
4772012007181	4772012007211	26-7-6-051	(51) INRAL UNIVERSAL RAL1023, Traffic yellow, satin mat., spray	400 ml	12
4772012007198	4772012007204	26-7-6-052	(52) INRAL UNIVERSAL RAL3000, Flame red, satin mat., spray	400 ml	12
4772012007228	4772012007235	26-7-6-053	(53) INRAL UNIVERSAL RAL5010, Gentian blue, satin mat., spray	400 ml	12
4772012007242	4772012007259	26-7-6-054	(54) INRAL UNIVERSAL RAL6005, Moss green, satin mat., spray	400 ml	12
4772012008430	4772012008447	26-7-0-002	INRAL LACQUER, Clear, glossy, acrylic varnish spray	400 ml	12

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4772012008454	4772012008461	26-7-0-003	INRAL LACQUER, Clear, matte, acrylic varnish spray	400 ml	12
4772012008638	4772012008645	26-7-0-010	INRAL GLITTER, Skaidri/sidabro, blizgi, lakas su blizgučiais	400 ml	6
4779027535012	4779027535029	26-7-2-001	INRAL GROUND RAL9003, White, matte, anti-corrosion primer	400 ml	12
4779027535036	4779027535043	26-7-2-002	INRAL GROUND RAL9011, Black, matte, anti-corrosion primer	400 ml	12
4779027535050	4779027535067	26-7-2-003	INRAL GROUND RAL7040, Grey, matte, anti-corrosion primer	400 ml	12
4779027535074	4779027535081	26-7-2-004	INRAL GROUND RAL3009, Red, matte, anti-corrosion primer	400 ml	12
4779027534817	4779027534824	26-7-3-001	INRAL ALU ZINC, Aluminium, matte, metal spray paint	400 ml	12
4779027535173	4779027535180	26-7-2-009	INRAL ZINC GROUND, Zinc, matte, anti-corrosion metal primer	400 ml	12
4779027539812	4779027539751	26-7-2-010	INRAL PLASTIC GROUND, Clear, matte, plastic primer	400 ml	12
4779027534831	4779027534848	26-7-3-011	INRAL CERAMICS, White, glossy, ceramic surfaces spray paint	400 ml	12
4779027535111	4779027535128	26-7-4-001	INRAL THERMAL RAL9003, White, matte, heat resistant spray paint	400 ml	12
4779027535135	4779027535142	26-7-4-002	INRAL THERMAL RAL9006, Aluminium, matte, heat resistant spray paint	400 ml	12
4779027535159	4779027535166	26-7-4-003	INRAL THERMAL RAL9011, Black, matte, heat resistant spray paint	400 ml	12
4772012004098	4772012004104	26-7-4-005	INRAL THERMAL RAL7016, Grey, matte, heat resistant spray paint	400 ml	12
4779027535975	4779027535982	26-7-7-001	INRAL ROOF RAL8017, Chocolate brown, glossy, roof & outdoor spray	400 ml	12
4779027535999	4779027536002	26-7-7-002	INRAL ROOF RAL3011, Brown red, glossy, roof & outdoor spray	400 ml	12
4779027536033	4779027536040	26-7-7-004	INRAL ROOF RAL6005, Moss green, glossy, roof & outdoor spray	400 ml	12
4772012002704	4772012002728	26-7-7-007	INRAL ROOF RAL8019, Grey brown, glossy, roof & outdoor spray	400 ml	12
4772012003671	4772012003688	26-7-7-008	INRAL ROOF RAL7016, Anthracite grey, glossy, roof & outdoor spray	400 ml	12
4772012007754	4772012007785	26-7-7-009	INRAL ROOF RAL7024, Graphite grey, glossy, roof & outdoor spray	400 ml	12
4779027534855	4779027534862	26-7-1-001	INRAL CHROME, Gold, metallic glossy, acrylic varnish spray	400 ml	12
4779027534879	4779027534886	26-7-1-002	INRAL CHROME, Copper, metallic glossy, acrylic varnish spray	400 ml	12
4779027534893	4779027534909	26-7-1-003	INRAL CHROME, Silver, metallic glossy, acrylic varnish spray	400 ml	12
4772012006771	4772012006788	26-8-4-001	INRAL CAMOUFLAGE RAL9021, Tar black, matte, outdoor paint	400 ml	6
4772012006795	4772012006801	26-8-4-002	INRAL CAMOUFLAGE RAL6031, Bronze green, matte, outdoor paint	400 ml	6
4772012006818	4772012006825	26-8-4-003	INRAL CAMOUFLAGE RAL7038, Agate grey, matte, outdoor paint	400 ml	6
4772012006832	4772012006849	26-8-4-004	INRAL CAMOUFLAGE RAL8027, Leather brown, matte, outdoor paint	400 ml	6
4772012006856	4772012006863	26-8-4-005	INRAL CAMOUFLAGE RAL1001, Beige, matte, outdoor paint	400 ml	6
4772012001295	4772012001370	26-7-5-007	INRAL FLUOMARKER, Yellow, matte, 500 ml temporary marking spray paint	500 ml	12
4772012001301	4772012001387	26-7-5-008	INRAL FLUOMARKER, Red, matte, 500 ml temporary marking spray paint	500 ml	12
4772012004814	4772012004821	26-7-5-009	INRAL FLUOMARKER, Orange, matte, 500 ml temporary marking spray paint	500 ml	12
4772012008478	4772012008485	26-7-5-010	INRAL FLUOMARKER, Green, matte, 500 ml temporary marking spray paint	500 ml	12
4779027534916	4779027534923	26-7-5-001	INRAL FLUORESCENT, Red, matte, spray paint	400 ml	12
4779027534954	4779027534961	26-7-5-003	INRAL FLUORESCENT, Orange, matte, spray paint	400 ml	12
4779027534978	4779027534985	26-7-5-004	INRAL FLUORESCENT, Yellow, matte, spray paint	400 ml	12

Barcode pcs	Box barcode	Code	Name	Filling	Pcs / box
4779027534992	4779027535005	26-7-5-005	INRAL FLUORESCENT, Green, matte, spray paint	400 ml	12
4779027539829	4779027539768	26-7-8-001	INRAL METALLIC, Red, metallic glossy, acrylic varnish spray	400 ml	12
4779027539843	4779027539782	26-7-8-002	INRAL METALLIC, Green, metallic glossy, acrylic varnish spray	400 ml	12
4779027539836	4779027539775	26-7-8-003	INRAL METALLIC, Blue, metallic glossy, acrylic varnish spray	400 ml	12
4779027539850	4779027539799	26-7-8-004	INRAL METALLIC, Black, metallic glossy, acrylic varnish spray	400 ml	12
4779027539867	4779027539805	26-7-8-005	INRAL METALLIC, Silver, metallic glossy, acrylic varnish spray	400 ml	12
4772012005323	4772012005330	26-7-8-006	INRAL METALLIC, Gold, metallic glossy, acrylic varnish spray	400 ml	12
4772012001271	4772012001356	26-7-4-004	INRAL RADIATOR, White, glossy, radiators & heaters spray paint	400 ml	12
4772012005200	4772012005217	26-8-3-001	INRAL METAL PAINT 4in1, Black, matte, anti-corrosion paint	400 ml	6
4772012005187	4772012005194	26-8-3-002	INRAL METAL PAINT 4in1, Metal grey anthracite, matte, anti-corrosion paint	400 ml	6
4772012008652	4772012008669	26-8-3-003	INRAL METAL PAINT 4in1, gold matte, anti-corrosion paint	400 ml	6
4772012004210	4772012004227	26-8-1-001	INRAL HAMMER, Gold, glossy, hammer effect spray paint	400 ml	6
4772012004197	4772012004203	26-8-1-002	INRAL HAMMER, Silver, glossy, hammer effect spray paint	400 ml	6
4772012004173	4772012004180	26-8-1-003	INRAL HAMMER, Copper, glossy, hammer effect spray paint	400 ml	6
4772012004234	4772012004241	26-8-1-004	INRAL HAMMER, Anthracite, glossy, hammer effect spray paint	400 ml	6
4772012004258	4772012004265	26-8-2-001	INRAL GRANITE, Obsidian black, matte, stone imitation spray paint	400 ml	6
4772012008676	4772012008683	26-8-2-002	INRAL GRANITE, cream, matte, stone imitation spray paint	400 ml	6
4772012008690	4772012008706	26-8-2-003	INRAL GRANITE, red bricks, matte, stone imitation spray paint	400 ml	6
4772012008591	4772012008607	26-8-2-010	INRAL RUST, rust brown, matte, rust imitation spray paint	400 ml	6
4772012008614	4772012008621	26-8-2-020	INRAL SAND, sandy, matte, sand imitation spray paint	400 ml	6



UAB Tegra state  
Savanoriu ave. 178A, Vilnius, Lithuania  
info@tegra.lt, www.tegrastate.eu

